

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

## Pass Thru Half Glass Door Heated Cabinet

Pass-Thru  
**PRO Series**

**Model : PRO-50-4H-G-PT**

### FEATURES & BENEFITS

- **Digital temperature control & monitor system**
  - Keep food products safe by maintaining constant temperatures.
  - Alarm beeps when doors are not sealed.
  - Early warning alarm program detects issues before malfunction occurs.
  - Digital display allows for easy monitoring.
  - Sensitive touch display.
- **Ducted fan air distribution system**  
 Maintains temperature within the food zone
- **On/Off switch**  
 ON/OFF switch is located on control panel
- **All stainless steel cabinet construction**  
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- **Sturdy, clean stainless steel shelving**  
 Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.
- **LED interior lighting**  
 Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.
- **High-density polyurethane insulation**  
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **Half length glass doors with locks**
- **Self-closing doors with stay open feature at 120 degrees**
- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
- **Lifetime guaranteed heavy duty hinges and handles**



| Model          | Swing Doors | CU./FT. | #of Shelves | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D* x H† (inches) |
|----------------|-------------|---------|-------------|-------------|------|----------------------|----------------------|
| PRO-50-4H-G-PT | 8           | 48.7    | 6           | 3000        | 15   | 623                  | 51 3/4 x 36 1/4 x 78 |

# Pass Thru Half Glass Door Heated Cabinet

Pass-Thru  
PRO Series

## Model : PRO-50-4H-G-PT

| ELECTRICAL DATA            |                 |
|----------------------------|-----------------|
| Voltage                    | 208/115/60/1    |
| Plug Type                  | ☉ NEMA L14-20P  |
| Full Load Amperes          | 15              |
| Wattage (W)                | 3000            |
| Feed Wires with Ground     | 4               |
| Cord Length (ft.)          | 8               |
| DIMENSIONAL DATA           |                 |
| # of Doors                 | 8               |
| # of Racks Accepted        | 2               |
| Net Capacity (cu. ft.)     | 48.7            |
| Ext. Length Overall (in.)  | 51 3/4 (1314mm) |
| Ext. Depth Overall (in.)*  | 36 1/4 (920mm)  |
| Ext. Height Overall (in.)† | 78 (1982mm)     |
| Int. Length Overall (in.)  | 42 1/4 (1073mm) |
| Int. Depth Overall (in.)   | 27 5/8 (702mm)  |
| Int. Height Overall (in.)  | 58 3/4 (1493mm) |
| # of Shelves               | 6               |
| Shelf Size (L x D) (in.)   | 22 3/4 x 26 3/8 |
| Net Weight (lbs.)          | 575             |
| Gross Weight (lbs.)        | 623             |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 2-1/2" for door handles.

† Height does not include 5" for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty

### ■ STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design


\*\* Lead time applies. Please contact your sales representative for more details to order.

### ■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

## PLAN VIEW

(unit : inch)

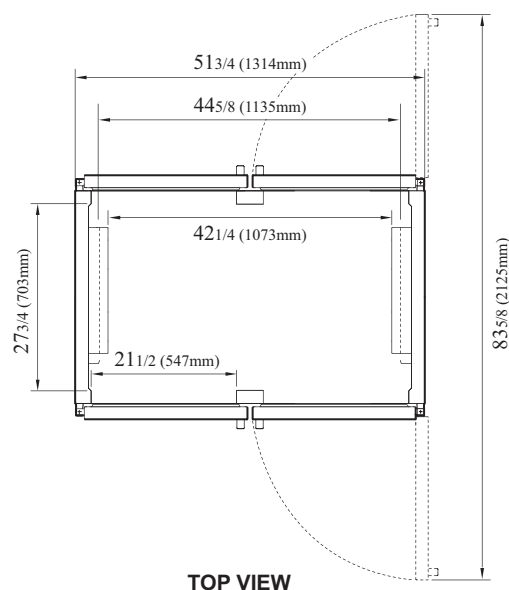

TOP VIEW

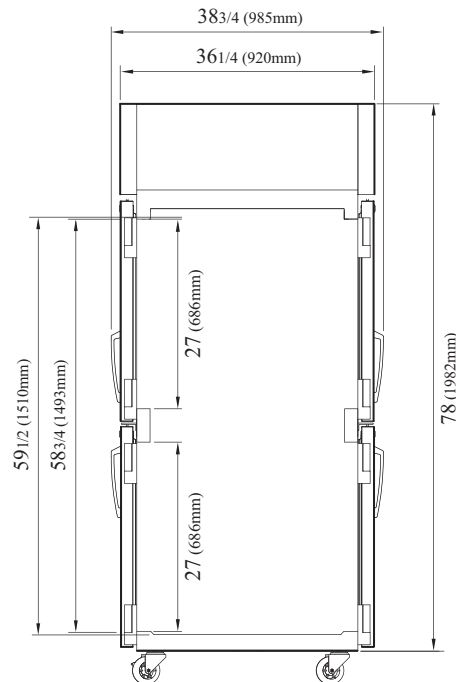

SIDE VIEW

Ver.20200421



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

GERMAN  
KNIFE

RADIANCE

REFRIGERATION SYSTEM  
**Turbo air**

**Texaking**