REFRIGERATOR MANUFACTURER
Turbo air
more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

Undercounter Refrigerator - Drawers

Undercounters
PRO Series

Model : PUR-48-D2R-N
PUR-48-D2L-N

FEATURES & BENEFITS

- ***Self-Cleaning Condenser***
  The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

- ***Digital temperature control & monitor system***
  Keep food products safe by maintaining constant temperatures. External digital display allows for easy monitoring.

- ***Hydrocarbon refrigerants (R-290)***
  With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

- ***Stainless steel cabinet construction***
  The PRO series model boasts a stainless steel interior (Aluminum door liner) and a **22 gauge** stainless steel exterior (galvanized steel bottom). It guarantees the utmost in cleanliness and long product life.
  The PRO series adds a touch of style to the most refined setting.

- ***Sturdy, clean stainless steel shelving***
  Shelves are the most important part of cleanliness as they come in direct contact with food. Only the PRO series uniquely provides stainless steel shelving.

- ***LED interior lighting & fan control***
  Energy efficient LED lighting lights every corner, making items easy to find. Fan control function automatically shuts off the fan when the door is open, which prevents hot air from being drawn in, thus maintaining the cool inner temperature.

- ***High-density polyurethane insulation***
  The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- ***Magnetic door/drawer gaskets***
  Magnetic door/drawer gaskets are of one-piece construction, removable without tools for ease of cleaning and replacement.

- ***Spring assisted heavy duty gravity hinge***

- ***Refrigerator holds 33°F ~ 38°F for the best in food preservation***

- ***Lifetime guaranteed heavy duty hinges and handles***



Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

- ***Built to maintain NSF standard temperatures in 100°F ambient***

- ***Each top drawer accommodates up to 6" deep, one (1) full size pan or two (2) 1/3 size pans with two (2) 1/6 size pans or six (6) 1/6 size pans. And each bottom drawer accommodates up to 6" deep, two (2) 1/3 size pans or four (4) 1/6 size pans (drawer pans not included)***

- ***PUR-48-D2R-N: (Left)Drawer + (Right)Right hinged door***
- ***PUR-48-D2L-N: (Right)Drawer + (Left)Left hinged door***

NATURAL Refrigerant · Intertek · Intertek · MADE IN U.S.A · 3 YEAR WARRANTY · Compressor 7 YEAR WARRANTY (U.S.A only)

Model	Swing Doors	Drawers	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
PUR-48-D2R(L)-N	**1**	**2**	**12.2**	**1**	**1/6**	**6.5**	**259**	**48 1/4 x 30 x 30**

Ver.20200521

*Depth does not include 2" for door handle & rear spacers. † Height does not include 5-3/8" for caster height.

Undercounter Refrigerator - Drawers

Undercounters
PRO Series


Model : PUR-48-D2R-N
PUR-48-D2L-N

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	NEMA 5-15P
Full Load Amperes	6.5
Compressor HP	1/6
Cord Length (ft.)	10
Refrigerant	R-290
DIMENSIONAL DATA	
Net Capacity (cu. ft.)	12.2
Ext. Length Overall (in.)	48 1/4 (1226mm)
Ext. Depth Overall (in.)*	30 (762mm)
Ext. Height Overall (in.)†	30 (762mm)
# of Doors	1
# of Drawers	2
# of Shelves	1
Shelf Size (L x D) (in.)	21 x 17
Net Weight (lbs.)	240
Gross Weight (lbs.)	259


Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.
* Depth does not include 2" for door handle & rear spacers.
† Height does not include 5-3/8" for caster height.

PLAN VIEW

(unit : inch)

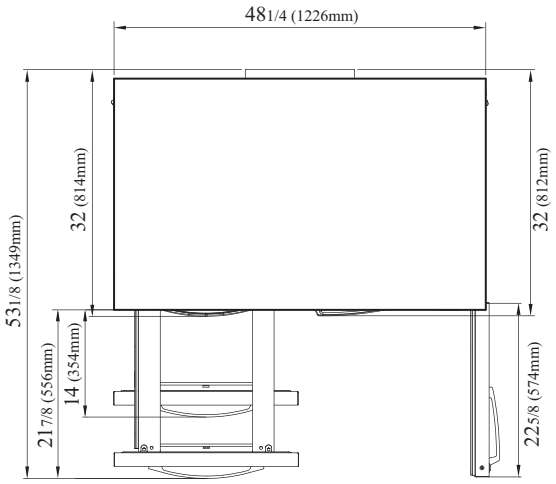

TOP VIEW

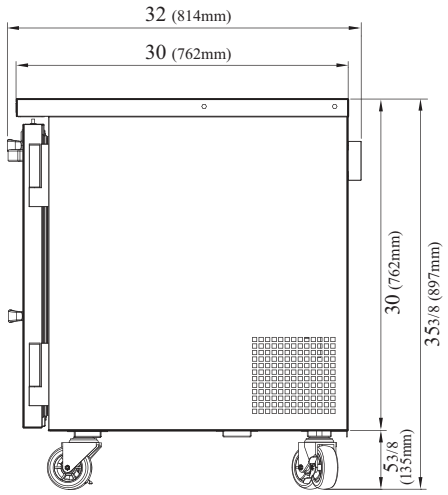

SIDE VIEW

■ WARRANTY : 3 Year Parts and Labor Warranty
Additional 4 Year Warranty on Compressor

■ STANDARD FEATURES

- ***Anti-corrosion coated evaporator***
- ***Self-contained system***
- ***Standard 4" dia. swivel casters with locks on the front set***
- ***Door locks standard***
- ***Ergonomically designed doors & drawers***

** Lead time applies. Please contact your sales representative for more details to order.

■ OPTIONAL ACCESSORIES

- 1" caster, ½" diameter & 13 TPI: S28R813660 (non-brake)
- 2.5" caster, ½" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, ½" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, ½" - 13 TPI x 1.54": LFM1213566
- 6" ABS plastic leg: 30221M0200
- 6" stainless steel leg: 30221M0600
- Stainless steel double overshelf: TSOS-4R
- Back splash guard: TU-48B

Ver.20200521

NATURAL Refrigerant | Intertek | Intertek | MADE IN U.S.A | 3 YEAR WARRANTY | Compressor 7 YEAR WARRANTY (U.S.A only)

■ **Turbo Air** : 800-627-0032 ■ **GK** : 800-500-3519
■ **Warranty** : 800-381-7770 ■ **AC** : 888-900-1002

Turbo air | GERMAN KNIFE | RADIANCE | Turbo air | Texaking