

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

## Top Open Island Freezer

**Model : TFS-11F-N**



### ≡ FEATURES & BENEFITS ≡

■ **Hydrocarbon refrigerants (R-290)**

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ **High-density polyurethane insulation**

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ **Horizontal display freezer for high impulse sales**

Flat lid display freezer provides convenient access and fast service and is ideal for high impulse sales such as frozen treats. Minimal frame glass lids allow excellent visibility with maximum merchandising effect.

■ **Tempered, energy-saving, Low-E glass sliding top**

Energy saving Low-emissivity glass top reduces outer heat gain and lowers energy consumption. Reinforced tempered glass lids for safety.

■ **White, anti-rust coating on the exterior reduces fingerprints**

■ **LED interior lighting with on/off switch**

■ **External digital temperature control**

■ **Painted white powder-coated steel interior**

■ **Two layers of rubber bumper guards around the cabinet**

■ **Manual defrost system with drain**

■ **Wire baskets come standard**

■ **Freezer holds -10°F ~ 8°F for the best in frozen food preservation**

**NATURAL**  
Refrigerant



| Model     | Sliding Doors | CU./FT. | #of Baskets | HP  | AMPS | Crated Weight (lbs.) | L x D x H* (inches)  |
|-----------|---------------|---------|-------------|-----|------|----------------------|----------------------|
| TFS-11F-N | 2             | 13.77   | 15          | 1/3 | 2.0  | 368                  | 40 x 31 1/2 x 31 1/4 |

# Top Open Island Freezer

## Model : TFS-11F-N

| ELECTRICAL DATA               |                                                                                              |
|-------------------------------|----------------------------------------------------------------------------------------------|
| Voltage                       | 115/60/1                                                                                     |
| Plug Type                     |  NEMA 5-15P |
| Full Load Amperes             | 2.0                                                                                          |
| Compressor HP                 | 1/3                                                                                          |
| Cord Length (ft.)             | 7                                                                                            |
| Refrigerant                   | R-290                                                                                        |
| DIMENSIONAL DATA              |                                                                                              |
| # of Sliding Doors            | 2                                                                                            |
| Net Capacity (cu. ft.)        | 13.77                                                                                        |
| Net Capacity (Gal.)           | 103                                                                                          |
| Ext. Length Overall (in.)     | 40 (1016mm)                                                                                  |
| Ext. Depth Overall (in.)      | 31 1/2 (800mm)                                                                               |
| Ext. Height Overall (in.)*    | 31 1/4 (793mm)                                                                               |
| Int. Length Overall (in.)     | 34 5/8 (880mm)                                                                               |
| Int. Depth Overall (in.)      | 26 1/8 (664mm)                                                                               |
| Int. Height Overall (in.)     | 23 7/8 (607mm)                                                                               |
| # of Baskets                  | 15                                                                                           |
| Basket Size (L x D x H) (in.) | (3) 10 3/8 x 8 x 8 3/4                                                                       |
|                               | (12) 11 1/8 x 8 x 9 1/2                                                                      |
| Net Weight (lbs.)             | 211                                                                                          |
| Gross Weight (lbs.)           | 368                                                                                          |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Height does not include 2-3/4" for caster height.

- **WARRANTY :** 2 Year Parts and Labor Warranty  
Additional 3 Year Warranty on Compressor

### ■ STANDARD FEATURES


- No plumbing required
- Self-contained system
- 2.5" dia. casters standard, two locking

### ■ Recommended operating conditions


TFS models are designed to operate in air conditioned environments where temperature and humidity are below 75°F and 55% relative humidity. Place units away from direct sunlight, rapid air movement and extreme temperature changes

## PLAN VIEW


(unit : inch)



TOP VIEW

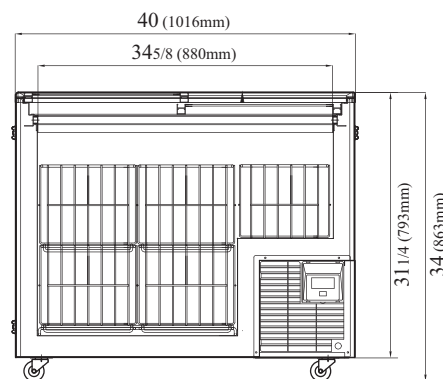

FRONT VIEW

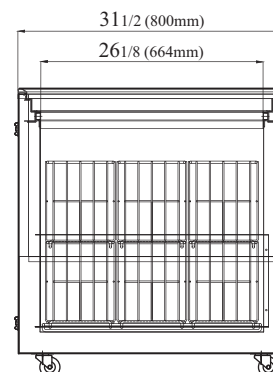

SIDE VIEW

Ver.20200827

**NATURAL**  
Refrigerant



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

**GERMAN KNIFE**

**RADIANCE**

REFRIGERATION SYSTEM  
**Turbo air**

**TEXAKING**