

49 cu ft Pass-Thru Refrigerators, Reach-In

- Key component to any high-volume cafeteria or commissary kitchen.
- Refill products from the back and serve from the front, creating efficiency in the kitchen or serving line.
- Available in solid door, glass door, and half-door combination options.



UCRP149-SS71A



UCRP149-GS71A



UCRP249-SS71A



UCRP249-GS71A



UCRP149-GG71A

Model	Description	Voltage/Hz/Phase/Amps	Shipping Weight
UCRP149-SS71A	49 cu ft Pass-Thru Refrigerator, 2 Front Door Solid, 2 Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP149-GS71A	49 cu ft Pass-Thru Refrigerator, 2 Front Door Glass, 2 Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP249-SS71A	49 cu ft Pass-Thru Refrigerator, 4 Half Front Door Solid, 4 Half Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP249-GS71A	49 cu ft Pass-Thru Refrigerator, 4 Half Front Door Glass, 4 Half Back Door Solid	115v / 60hz / 1 / 6.4	440 lb
UCRP149-GG71A	49 cu ft Pass-Thru Refrigerator, 2 Front Door Glass, 2 Back Door Glass	115v / 60hz / 1 / 6.4	440 lb

Specifications

Dimensions: 83 ¼" H x 56 7/10" W x 32" D (doors closed), 84 ¼" (doors open)

AISI 304 stainless steel interior and exterior with locks

Autodefrost

CFC-free high-density polyurethane insulated cabinet

Environmentally friendly R290 refrigerant: 3.5 oz (0.100kg)

Electronic digital temperature control with alarms

Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P

High efficiency compressor, top mount

High efficiency evaporator coil & condenser

LED interior lighting

NSF/ANSI Standard 7 compliant

Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design


Temperature range: 28°F to 46°F

Volume of 49 cu ft 2 sections, includes 12 pairs of L style tray guides (trays not included)




Product Specifications • 49 cu ft Pass-Thru Refrigerators, Reach-In


Front

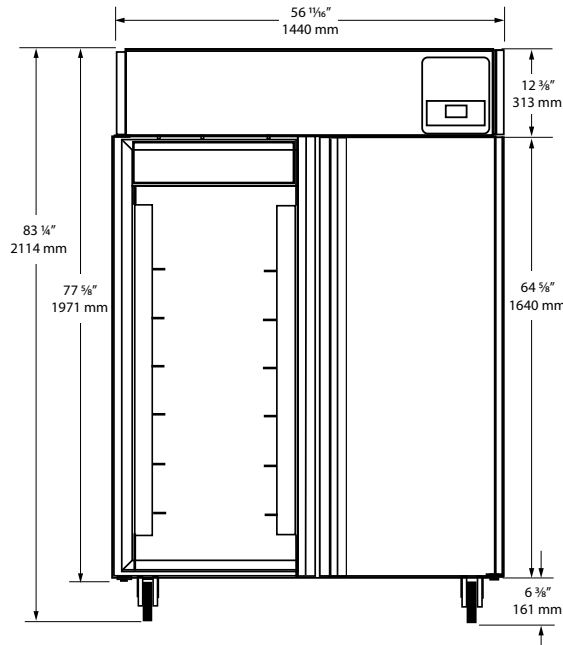

Side

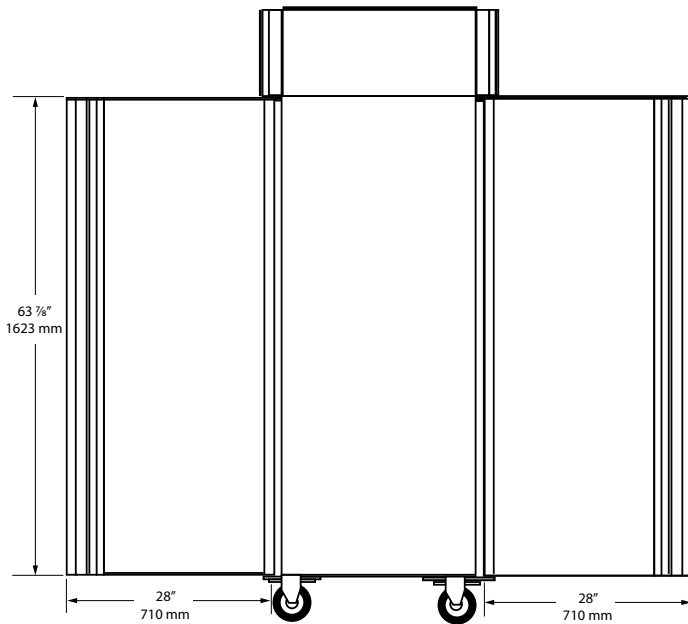

Top

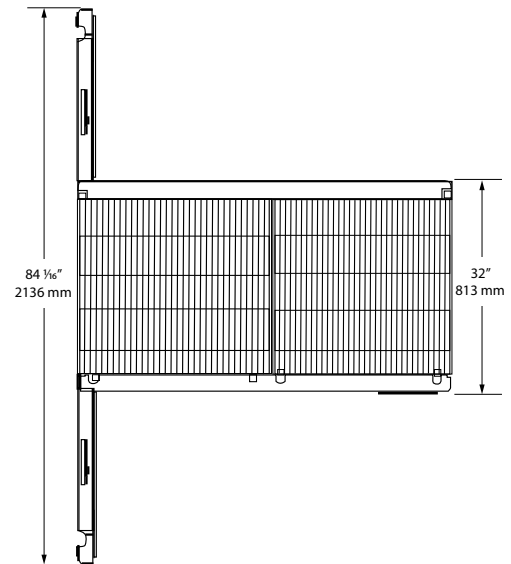

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

