


Back Bar cooler-Swing doors series

- Exterior: Coated steel.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
  - Refrigeration system keeps food at safe temperature between 36°F and 50 °F (2°C to 10°C).
  - Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
  - TOP LED lighting.
  - Locks and keys included.

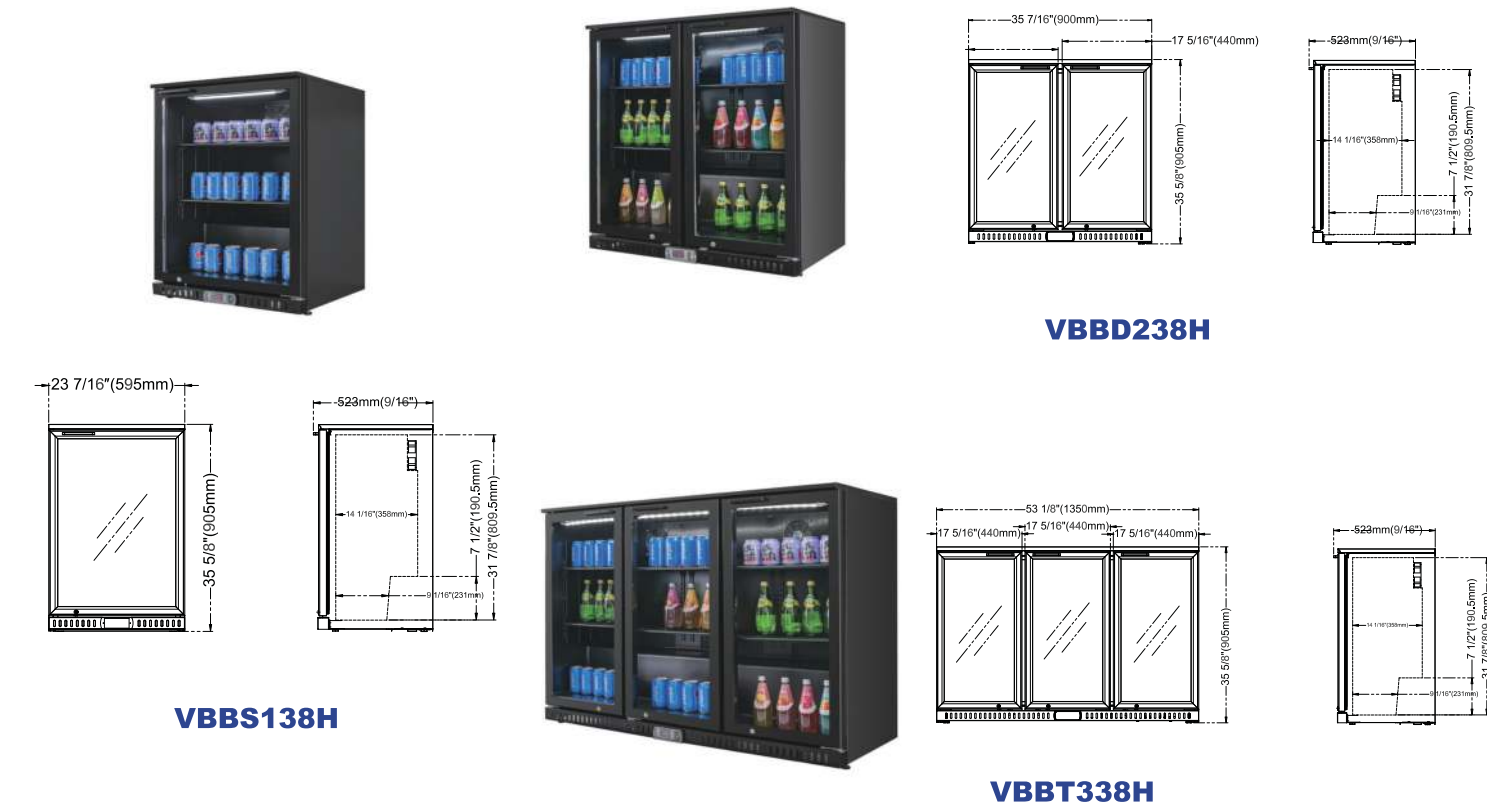

| MODEL    | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP   | AMPS | VOLTAGE  | PLUG TYPE |
|----------|-------|---------|--------------------------------------|------------------------------|------|------|----------|-----------|
| VBBS138H | 1     | 2       | 23 5/8*20 1/2*35 3/8<br>600×520×900  | 4.7<br>134                   | 1/5  | 0.9  | 115/60/1 | 5-15P     |
| VBBD238H | 2     | 4       | 35 3/8*20 1/2*35 3/8<br>900×520×900  | 7.5<br>212                   | 1/5  | 1.4  | 115/60/1 | 5-15P     |
| VBBT338H | 3     | 6       | 53 1/8*20 1/2*35 3/8<br>1350×520×900 | 11.6<br>328                  | 1/4+ | 2.1  | 115/60/1 | 5-15P     |

Back Bar cooler-Sliding doors series

- Exterior: Coated steel.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
  - Refrigeration system keeps food at safe temperature between 36°F and 50 °F (2°C to 10°C).
  - Shelves: Adjustable heavy-duty epoxy coated shelves.
  - Glass doors self-closing by gravity.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
  - Top LED lighting.
  - Locks and keys included.



| MODEL    | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP   | AMPS | VOLTAGE  | PLUG TYPE |
|----------|-------|---------|--------------------------------------|------------------------------|------|------|----------|-----------|
| VBBD238S | 2     | 4       | 35 3/8*20 1/2*35 3/8<br>900×520×900  | 7.5<br>212                   | 1/5  | 1.4  | 115/60/1 | 5-15P     |
| VBBT338S | 3     | 6       | 53 1/8*20 1/2*35 3/8<br>1350×520×900 | 11.6<br>328                  | 1/4+ | 2.1  | 115/60/1 | 5-15P     |