

# **VITTLIFE**

*COMMERCIAL REFRIGERATION LINEUP*

## ***About Us***

***As a Food Service Establishment Owner and Professional, what do you lose sleep over: Equipment breakdowns or malfunction as that drives a wedge in the smooth operations of any restaurant, cafeteria, canteen, mom & pop store or supermarket . That' s where VITLIFE Commercial can play role of a trusted partner for you***

***VITLIFE Commercial is established by senior leaders in Industry and we have spent our entire life taking care of our customers. For us, your wish is our command. Professional product line that delivers when you need them most . Unrelenting durability and reliability, including Reach in Refrigerators & Freezers , pizza tables, chef bases , under counters , prep tables, Uprights, back bars , Merchandisers. You name it we have it***

***Our promise comes from who we are----- World class manufacturing facilities, state of the art equipment, leading product designers, laser focus on product innovation and quality, highly dependable logistics and order fulfillment processes which has led to strong global market presence and success in both mature and developing markets***

***All of this is possible through amazing teamwork where everyone is committed and contributes to your success. From shop floor operator to warehouse handler to our local technician and service partner , we leave no stone unturned in producing and bring to you best in class products which serve you wherever they are installed***

***We look forward to serving you in our best capacity as your success is our success***

### **Hot pipe Anti-Condensation**

**Instead of Electric Wire Heater  
More Security  
Energy Saving**



**The Middle Mullion  
Foamed Together With  
Unit Body  
No Gap More Strong**

**New Designed Air Duct  
Air Flows Faster  
Make the Temperature  
More Balance**



**Add Air Deflector  
Make the Temperature  
More Balance**





**Inside Wall is Flat  
Beautiful & Easy to Clean**

**Vertical Chiller & Freezer**

**Add an Air Deflector  
On the Inner Back  
Make the Temperature  
More Balance**



**Easy to Clean  
adjustable shelves**



- Back bar
- Beverage cooler
- Vertical Chiller & Freezer



**BR/BF600V  
Shelf Size can Fit  
Basket and 2/1 GN Pan**



## Reach-in Solid Door Refrigerator - Top-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41 °F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Locks and keys included.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles & control panels available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- EC fan motor, lower energy consumption, less noise, higher efficiency.



**VRT27R**



**VRT54R**

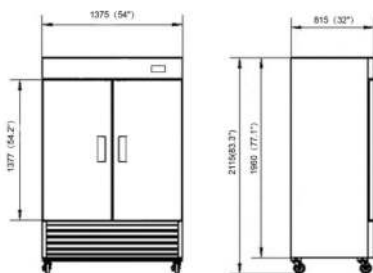

| MODEL  | DOORS | SHELVES | DIMENSION(WxDxH)<br>Inches<br>mm        | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------|-------|---------|-----------------------------------------|------------------------------|-----|------|----------|-----------|
| VRT27R | 1     | 3       | 27 *32 1/16*82 1/16<br>686*815*2085     | 594<br>21                    | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VRT54R | 2     | 6       | 54 1/8*32 1/16*82 1/16<br>1375*815*2085 | 1302<br>46                   | 1/4 | 2.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Reach-in Solid Door Refrigerator - Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41 °F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Locks and keys included.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles & control panels available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- EC fan motor, lower energy consumption, less noise, higher efficiency.



**VRB27R**



**VRB54R**

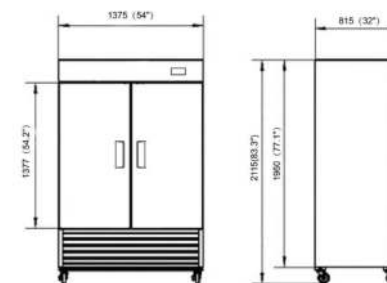

| MODEL  | DOORS | SHELVES | DIMENSION(WxDxH)<br>Inches<br>mm       | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------|-------|---------|----------------------------------------|------------------------------|-----|------|----------|-----------|
| VRB27R | 1     | 3       | 27 *32 1/16*83 1/4<br>686*815*2115     | 594<br>21                    | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VRB54R | 2     | 6       | 54 1/8*32 1/16*83 1/4<br>1375*815*2115 | 1302<br>46                   | 1/4 | 2.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Reach-in Solid Door Freezer - Top-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between -8°F and 0 °F (-22 °C to -18 °C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles & control panels available.
- Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Locks and keys included.
- Self-Closing doors with 90 degree stay-open feature.



**VRT27F**



**VRT54F**



| MODEL  | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm        | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------|-------|---------|-----------------------------------------|------------------------------|-----|------|----------|-----------|
| VRT27F | 1     | 3       | 27 *32 1/16*82 1/16<br>686*815*2085     | 594<br>21                    | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VRT54F | 2     | 6       | 54 1/8*32 1/16*82 1/16<br>1375*815*2085 | 1302<br>46                   | 1/2 | 5    | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Reach-in Solid Door Freezer - Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between -8°F and 0 °F (-22 °C to -18 °C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles & control panels available.
- Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Locks and keys included.
- Self-Closing doors with 90 degree stay-open feature.



**VRB27F**



**VRB54F**

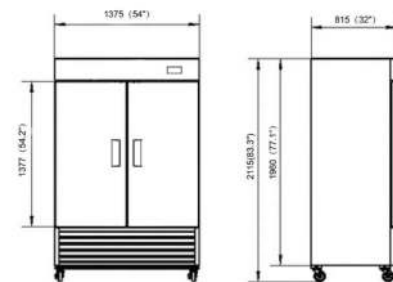

| MODEL  | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm       | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------|-------|---------|----------------------------------------|------------------------------|-----|------|----------|-----------|
| VRB27F | 1     | 3       | 27 *32 1/16*83 1/4<br>686*815*2115     | 594<br>21                    | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VRB54F | 2     | 6       | 54 1/8*32 1/16*83 1/4<br>1375*815*2115 | 1302<br>46                   | 1/2 | 5    | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# Reach-in Glass Door Refrigerator - Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Door with 2 layers' tempered glass.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Locks and keys included.
- Self-Closing doors with 90 degree stay-open feature.



VRB27RG



VRB54RG

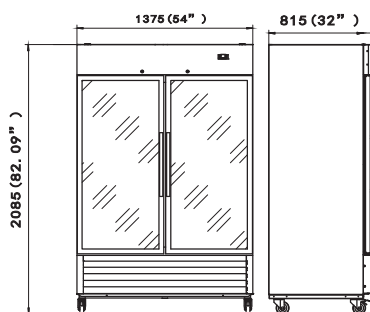

| MODEL   | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm       | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|---------|-------|---------|----------------------------------------|------------------------------|-----|------|----------|-----------|
| VRB27RG | 1     | 3       | 27 *32 1/16*83 1/4<br>686*815*2115     | 594<br>21                    | 1/5 | 2    | 115/60/1 | 5-15P     |
| VRB54RG | 2     | 6       | 54 1/8*32 1/16*83 1/4<br>1375*815*2115 | 1302<br>46                   | 1/4 | 2.5  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# Reach-in Glass Door Freezer- Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between -8°F and 0 °F (-22 °C to -18 °C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- 3 layers' tempered glass door with heater.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Locks and keys included.
- Self-Closing doors with 90 degree stay-open feature.



VRB27FG



VRB54FG

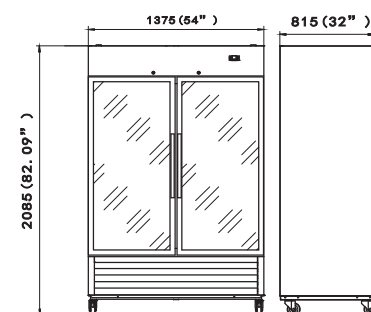

| MODEL   | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm       | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|---------|-------|---------|----------------------------------------|------------------------------|-----|------|----------|-----------|
| VRB27FG | 1     | 3       | 27 *32 1/16*83 1/4<br>686*815*2115     | 594<br>21                    | 1/3 | 3.2  | 115/60/1 | 5-15P     |
| VRB54FG | 2     | 6       | 54 1/8*32 1/16*83 1/4<br>1375*815*2115 | 1302<br>46                   | 1/2 | 5.3  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Under Counter Refrigerator - VUC Series

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Evaporation fan stop working when door is open, energy saving.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Option of Backsplashes available.
- Option of different handles .



| MODEL  | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm    | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------|-------|---------|-------------------------------------|------------------------------|-----|------|----------|-----------|
| VUC29R | 1     | 1       | 29*30*35 9/16<br>732*762*903        | 7.3<br>207                   | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VUC48R | 2     | 2       | 48 1/4*30*35 9/16<br>1225*762*903   | 13.1<br>373                  | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VUC60R | 2     | 2       | 60 1/4*30*35 9/16<br>1530*762*903   | 17<br>482                    | 1/4 | 2.1  | 115/60/1 | 5-15P     |
| VUC72R | 3     | 3       | 72 11/16*30*35 9/16<br>1846*762*903 | 20.5<br>583                  | 1/4 | 2.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Under Counter Freezer- VUC Series

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between -8°F and 0 °F (-22 °C to -18 °C).
- Self-Closing doors with 90 degree stay-open feature.
- Evaporation fan stop working when door is open, energy saving.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles .
- Pre installed heavy-duty casters with brakes.
- Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Option of Backsplashes available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.



| MODEL  | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm    | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------|-------|---------|-------------------------------------|------------------------------|-----|------|----------|-----------|
| VUC29F | 1     | 1       | 29*30*35 9/16<br>732*762*903        | 7.3<br>207                   | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VUC48F | 2     | 2       | 48 1/4*30*35 9/16<br>1225*762*903   | 13.1<br>373                  | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VUC60F | 2     | 2       | 60 1/4*30*35 9/16<br>1530*762*903   | 17<br>482                    | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VUC72F | 3     | 3       | 72 11/16*30*35 9/16<br>1846*762*903 | 20.5<br>583                  | 1/2 | 4.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Under Counter Refrigerator With Backsplash Series

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Evaporation fan stop working when door is open, energy saving.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Option of Backsplashes available.
- Option of different handles .



| MODEL   | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm    | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|---------|-------|---------|-------------------------------------|------------------------------|-----|------|----------|-----------|
| VUC29RW | 1     | 1       | 29*30*39 9/16<br>732*762*992        | 7.3<br>207                   | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VUC48RW | 2     | 2       | 48 1/4*30*39 9/16<br>1225*762*992   | 13.1<br>373                  | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VUC60RW | 2     | 2       | 60 1/4*30*39 9/16<br>1530*762*992   | 17<br>482                    | 1/4 | 2.1  | 115/60/1 | 5-15P     |
| VUC72RW | 3     | 3       | 72 11/16*30*39 9/16<br>1846*762*992 | 20.5<br>583                  | 1/4 | 2.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Under Counter Freezer With Backsplash Series

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between -8°F and 0 °F (-22 °C to -18 °C).
- Self-Closing doors with 90 degree stay-open feature.
- Evaporation fan stop working when door is open, energy saving.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles .
- Pre installed heavy-duty casters with brakes.
- Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
- EC fan motor, lower energy consumption, less noise, higher efficiency.
- Option of Backsplashes available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.



| MODEL   | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm    | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|---------|-------|---------|-------------------------------------|------------------------------|-----|------|----------|-----------|
| VUC29FW | 1     | 1       | 29*30*39 9/16<br>732*762*992        | 7.3<br>207                   | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VUC48FW | 2     | 2       | 48 1/4*30*39 9/16<br>1225*762*992   | 13.1<br>373                  | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VUC60FW | 2     | 2       | 60 1/4*30*39 9/16<br>1530*762*992   | 17<br>482                    | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VUC72FW | 3     | 3       | 72 11/16*30*39 9/16<br>1846*762*992 | 20.5<br>583                  | 1/2 | 4.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Sandwich/Salad Prep Table

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Cutting boards and pans available.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles .
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- Evaporation fan stop working when door is open, energy saving.
- EC fan motor, lower energy consumption, less noise, higher efficiency.



| MODEL | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm    | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|-------|-------|---------|-------------------------------------|------------------------------|-----|------|----------|-----------|
| VSP29 | 1     | 1       | 29*30*42 5/8<br>732*762*1082        | 7.6<br>215                   | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VSP48 | 2     | 2       | 48 1/4*30*42 5/8<br>1225*762*1082   | 13.8<br>390                  | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VSP60 | 2     | 2       | 60 1/4*30*42 5/8<br>1530*762*1082   | 17.8<br>505                  | 1/4 | 2.1  | 115/60/1 | 5-15P     |
| VSP72 | 3     | 3       | 72 11/16*30*42 5/8<br>1846*762*1082 | 21.2<br>601                  | 1/4 | 2.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

## Mega top Sandwich/Salad Prep Table

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Cutting boards and pans available.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles .
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- Evaporation fan stop working when door is open, energy saving.
- EC fan motor, lower energy consumption, less noise, higher efficiency.




| MODEL    | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm    | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|----------|-------|---------|-------------------------------------|------------------------------|-----|------|----------|-----------|
| VSP29(M) | 1     | 1       | 29*30*42 5/8<br>732*762*1082        | 7.6<br>215                   | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VSP48(M) | 2     | 2       | 48 1/4*30*42 5/8<br>1225*762*1082   | 13.8<br>390                  | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VSP60(M) | 2     | 2       | 60 1/4*30*42 5/8<br>1530*762*1082   | 17.8<br>505                  | 1/4 | 2.1  | 115/60/1 | 5-15P     |
| VSP72(M) | 3     | 3       | 72 11/16*30*42 5/8<br>1846*762*1082 | 21.2<br>601                  | 1/4 | 2.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# Pizza Prep Table

- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Cutting boards and pans available.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles .
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- Evaporation fan stop working when door is open, energy saving.
- EC fan motor, lower energy consumption, less noise, higher efficiency.

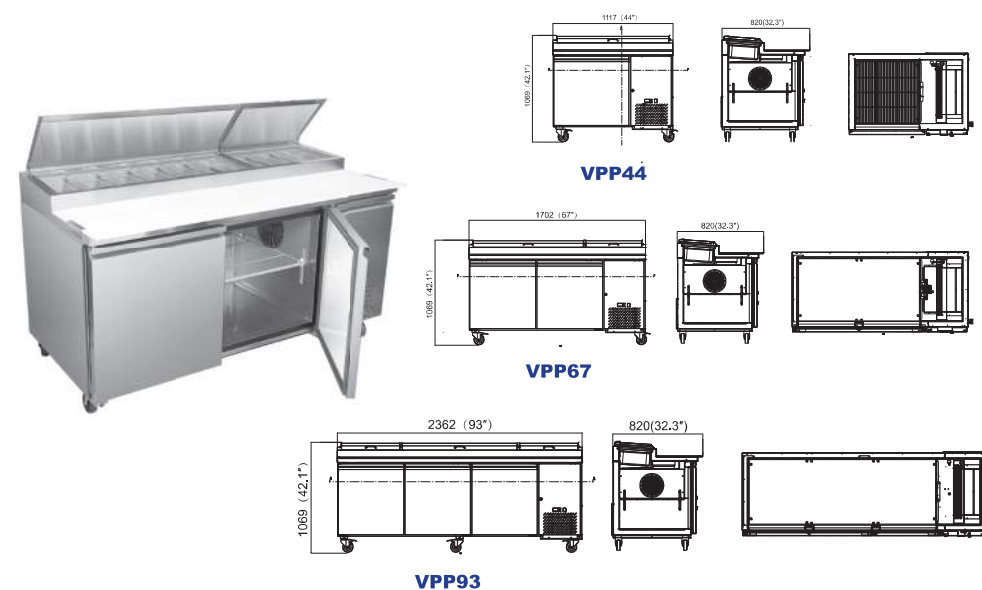


| MODEL | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|-------|-------|---------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VPP44 | 1     | 1       | 44*32 5/16*42 1/16<br>1142*880*1136  | 10.9<br>310                  | 1/5 | 1.7  | 115/60/1 | 5-15P     |
| VPP67 | 2     | 2       | 67 *32 5/16*42 1/16<br>1727*880*1136 | 20.9<br>592                  | 1/3 | 2.9  | 115/60/1 | 5-15P     |
| VPP93 | 3     | 3       | 93*32 5/16*42 1/16<br>2387*880*1136  | 30.8<br>872                  | 1/2 | 4.1  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# Chef Base Refrigerator

- Stainless steel interior and exterior, Galvanized sheet back.
- Stainless steel top equipped with a marine edge enables the unit's top to contain drips and spills for easy cleanup.
- Refrigeration system keeps food at safe temperatures, between 33°F and 41°F (0.5°C to 5°C).
- Preinstalled heavy-duty casters with brakes.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Evaporation fan stop working when door is open, energy saving.
- Heavy-duty pull handles.

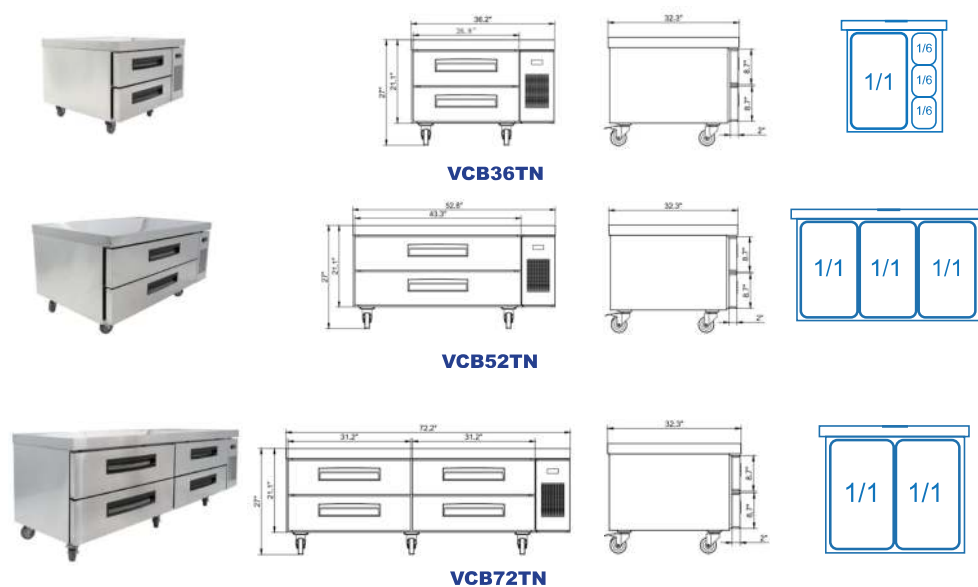

| MODEL   | DOORS | GN PANS<br>FOR EVERY<br>DRAWER | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|---------|-------|--------------------------------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VCB36TN | 2     | 3*1/6+1*1/1                    | 44*32 5/16*42 1/16<br>1142*880*1136  | 10.9<br>310                  | 1/5 | 2.6  | 115/60/1 | 5-15P     |
| VCB52TN | 2     | 3*1/1                          | 67 *32 5/16*42 1/16<br>1727*880*1136 | 20.9<br>592                  | 1/5 | 2.7  | 115/60/1 | 5-15P     |
| VCB72TN | 4     | 2*1/1                          | 93*32 5/16*42 1/16<br>2387*880*1136  | 30.8<br>872                  | 1/5 | 3.1  | 115/60/1 | 5-15P     |




VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# Refrigerated Topping Unit


- Interior and exterior stainless steel material for high level product.
- High quality famous compressor.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Accept GN1/6 pans range.
- CFC free foaming.
- Agjustable feet.
- Refrigeration system keeps food at safe temperature between 32°F and 50 °F (0 °C to 10°C).



**VRTR4**



**VRTR8**

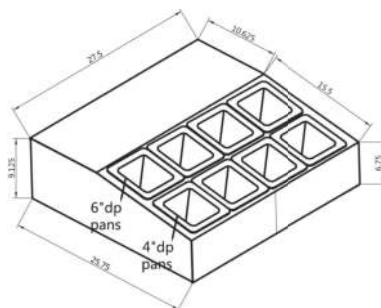

| MODEL | GN PANS | DIMENSION(WxDxH)<br>inches<br>mm        | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|-------|---------|-----------------------------------------|-----|------|----------|-----------|
| VRTR4 | GN1/6*4 | 14 15/16*25 13/16*9 5/16<br>379*656*236 | 1/5 | 1.4  | 115/60/1 | 5-15P     |
| VRTR8 | GN1/6*8 | 27 1/2*25 13/16*9 5/16<br>699*656*236   | 1/5 | 1.4  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# VRX


- Interior and exterior stainless steel material for high level product.
- High quality famous compressor.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- CFC free foaming.
- Agjustable feet.
- Refrigeration system keeps food at safe temperature between 33°F and 41 °F (0.5 °C to 5°C).
- Option of LED lighting.



**VVRX with glass top**



**VVRX with stainless steel lid**

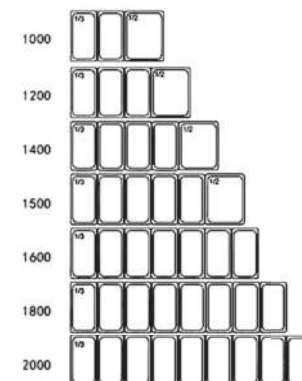

| MODEL        | GN PANS             | DIMENSION(WxDxH)<br>inches<br>mm     | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|--------------|---------------------|--------------------------------------|-----|------|----------|-----------|
| VVRX1200/380 | GN1/3*3+<br>GN1/2*1 | 47 1/4*15 1/2*17 1/8<br>1200*395*435 | 1/5 | 1.4  | 115/60/1 | 5-15P     |
| VVRX1500/380 | GN1/3*5+<br>GN1/2*1 | 59*15 1/2*17 1/8<br>1500*395*435     | 1/5 | 1.4  | 115/60/1 | 5-15P     |
| VVRX2000/380 | GN1/3*9             | 78 3/4*15 1/2*17 1/8<br>2000*395*435 | 1/5 | 1.4  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)  
[www.vitlifecommercial.com](http://www.vitlifecommercial.com)

# Upright Ventilated Chiller

- Exterior: Coated steel. Black or white finish available.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of external or full length handles.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Leveling feet or casters are available.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- The door can be reversed left and right.
- Option of top LED lighting



| MODEL    | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|----------|---------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VBR200VW | 2       | 23 3/8*25 3/4*34 5/8<br>595x655x880  | 4<br>115                     | 1/5 | 1.5  | 115/60/1 | 5-15P     |
| VBR400VW | 4       | 23 3/8*26 1/8*74 1/8<br>595x662x1882 | 10.4<br>293                  | 1/5 | 1.5  | 115/60/1 | 5-15P     |
| VBR600VW | 4       | 30 1/2*30*74 1/8<br>775x762x1882     | 18<br>510                    | 1/4 | 2.0  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

# Upright Ventilated Freezer

- Exterior: Coated steel. Black or white finish available.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between -8°F and 0 °F (-22 °C to -18 °C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of external or full length handles.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Leveling feet or casters are available.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- The door can be reversed left and right.
- Option of top LED lighting



| MODEL    | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|----------|---------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VBF200VW | 2       | 23 3/8*25 3/4*34 5/8<br>595x655x880  | 4<br>115                     | 1/5 | 1.9  | 115/60/1 | 5-15P     |
| VBF400VW | 4       | 23 3/8*26 1/8*74 1/8<br>595x662x1882 | 10.4<br>293                  | 1/3 | 3.3  | 115/60/1 | 5-15P     |
| VBF600VW | 4       | 30 1/2*30*74 1/8<br>775x762x1882     | 18<br>510                    | 1/2 | 5.5  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

## Upright Ventilated Chiller-Glass door series

- Exterior: Coated steel. Black or white finish available.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of external or full length handles.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Leveling feet or casters are available.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency.
- Top LED lighting.
- Aluminum alloy door frame and 2 layers' tempered glass.




| MODEL     | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|-----------|---------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VBR200VGW | 2       | 23 3/8"25 3/4"34 5/8<br>595x655x880  | 4<br>115                     | 1/6 | 1.5  | 115/60/1 | 5-15P     |
| VBR400VGW | 4       | 23 3/8"26 1/8"74 1/8<br>595x662x1882 | 10.4<br>293                  | 1/6 | 1.5  | 115/60/1 | 5-15P     |
| VBR600VGW | 4       | 30 1/2"30"74 1/8<br>775x762x1882     | 18<br>510                    | 1/5 | 2.0  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

## Upright Ventilated Chiller-Glass door series

- Exterior: Coated steel. Black or white finish available.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between -8°F and 0°F (-22°C to -18°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of external or full length handles.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Leveling feet or casters are available.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency.
- Top LED lighting.
- Aluminum alloy door frame and 3 layers' tempered glass with heater.

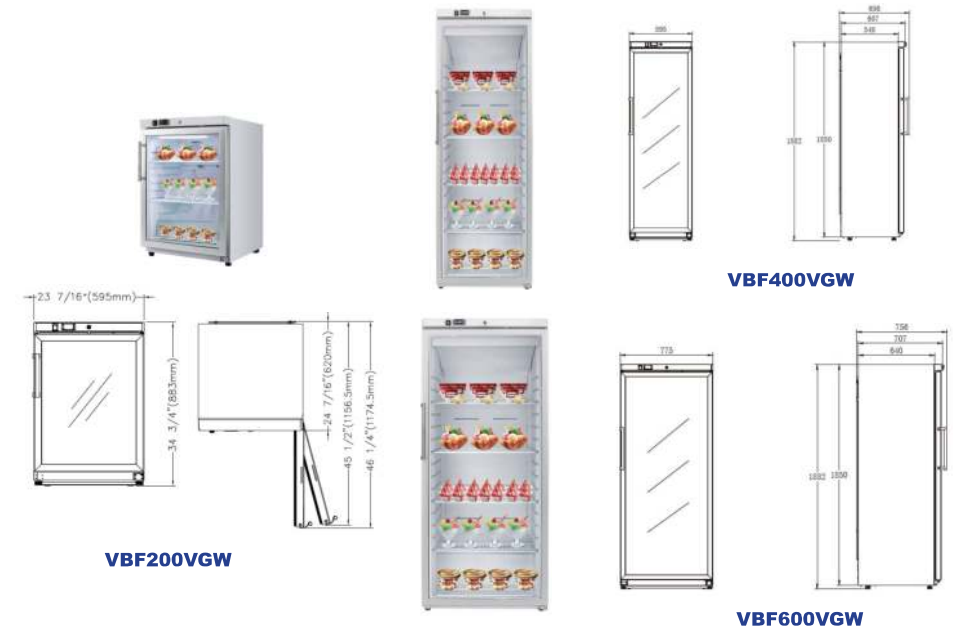



| MODEL     | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|-----------|---------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VBF200VGW | 2       | 23 3/8"25 3/4"34 5/8<br>595x655x880  | 4<br>115                     | 1/5 | 2.3  | 115/60/1 | 5-15P     |
| VBF400VGW | 4       | 23 3/8"26 1/8"74 1/8<br>595x662x1882 | 10.4<br>293                  | 1/3 | 3.3  | 115/60/1 | 5-15P     |
| VBF600VGW | 4       | 30 1/2"30"74 1/8<br>775x762x1882     | 18<br>510                    | 1/2 | 5.7  | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

## Back Bar cooler-Swing doors series

- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- TOP LED lighting.
- Locks and keys included.

**VBBD238H****VBBS138H****VBBT338H**





| MODEL    | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP   | AMPS | VOLTAGE  | PLUG TYPE |
|----------|-------|---------|--------------------------------------|------------------------------|------|------|----------|-----------|
| VBBS138H | 1     | 2       | 23 5/8*20 1/2*35 3/8<br>600×520×900  | 4.7<br>134                   | 1/5  | 0.9  | 115/60/1 | 5-15P     |
| VBBD238H | 2     | 4       | 35 3/8*20 1/2*35 3/8<br>900×520×900  | 7.5<br>212                   | 1/5  | 1.4  | 115/60/1 | 5-15P     |
| VBBT338H | 3     | 6       | 53 1/8*20 1/2*35 3/8<br>1350×520×900 | 11.6<br>328                  | 1/4+ | 2.1  | 115/60/1 | 5-15P     |



**VITLIFE AMERICA LLC**  
**320 WINFIELD RD, WARRENVILLE, IL 60555**  
**Tel: 800 604 5402**  
**Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)**  
**[www.vitlifecommercial.com](http://www.vitlifecommercial.com)**

## Back Bar cooler-Sliding doors series

- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Top LED lighting.
- Locks and keys included.

**VBBD238S****VBBT338S**

| MODEL    | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP   | AMPS | VOLTAGE  | PLUG TYPE |
|----------|-------|---------|--------------------------------------|------------------------------|------|------|----------|-----------|
| VBBD238S | 2     | 4       | 35 3/8*20 1/2*35 3/8<br>900×520×900  | 7.5<br>212                   | 1/5  | 1.4  | 115/60/1 | 5-15P     |
| VBBT338S | 3     | 6       | 53 1/8*20 1/2*35 3/8<br>1350×520×900 | 11.6<br>328                  | 1/4+ | 2.1  | 115/60/1 | 5-15P     |



**VITLIFE AMERICA LLC**  
**320 WINFIELD RD ,WARRENVILLE, IL 60555**  
**Tel: 800 604 5402**  
**Email : [info@vitlifecommercial.com](mailto:info@vitlifecommercial.com)**  
**[www.vitlifecommercial.com](http://www.vitlifecommercial.com)**

## Merchandising Swing Glass Door Refrigerator

- Ventilated cooling system, auto defrost.
- Exterior: Coated steel.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).

- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- C: with canopy T: without canopy



| MODEL     | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm     | CAPACITY<br>cu.ft.<br>liters | HP  | AMPS | VOLTAGE  | PLUG TYPE |
|-----------|-------|---------|--------------------------------------|------------------------------|-----|------|----------|-----------|
| VSC188VCW | 1     | 4       | 19 5/8*23 1/2*60 1/4<br>500*596*1531 | 6.4<br>181                   | 1/5 | 2.2  | 115/60/1 | 5-15P     |
| VSC198VTW | 1     | 4       | 19 5/8*23 1/2*60 1/4<br>500*596*1531 | 6.6<br>188                   | 1/5 | 2.2  | 115/60/1 | 5-15P     |
| VSC288VCW | 1     | 4       | 19 5/8*23 1/2*70 7/8<br>550*596*1801 | 8.8<br>249                   | 1/5 | 2.3  | 115/60/1 | 5-15P     |
| VSC298VTW | 1     | 4       | 19 5/8*23 1/2*70 7/8<br>550*596*1801 | 9.1<br>258                   | 1/5 | 2.3  | 115/60/1 | 5-15P     |
| VSC388VCW | 1     | 4       | 23 3/8*24 5/8*76 5/8<br>595*626*1946 | 12.3<br>348                  | 1/5 | 2.4  | 115/60/1 | 5-15P     |
| VSC398VTW | 1     | 4       | 23 3/8*24 5/8*76 5/8<br>595*626*1946 | 12.6<br>356                  | 1/5 | 2.4  | 115/60/1 | 5-15P     |
| VSC488VCW | 1     | 4       | 27 1/2*26 5/8*76 5/8<br>700*676*1946 | 16.5<br>468                  | 1/5 | 2.6  | 115/60/1 | 5-15P     |
| VSC498VTW | 1     | 4       | 27 1/2*26 5/8*76 5/8<br>700*676*1946 | 16.9<br>478                  | 1/5 | 2.6  | 115/60/1 | 5-15P     |




VITLIFE AMERICA LLC  
320 WINFIELD RD, WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

## Merchandising Swing Glass Door Refrigerator

- Ventilated cooling system, auto defrost.
- Exterior: Coated steel.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).

- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- C: with canopy T: without canopy

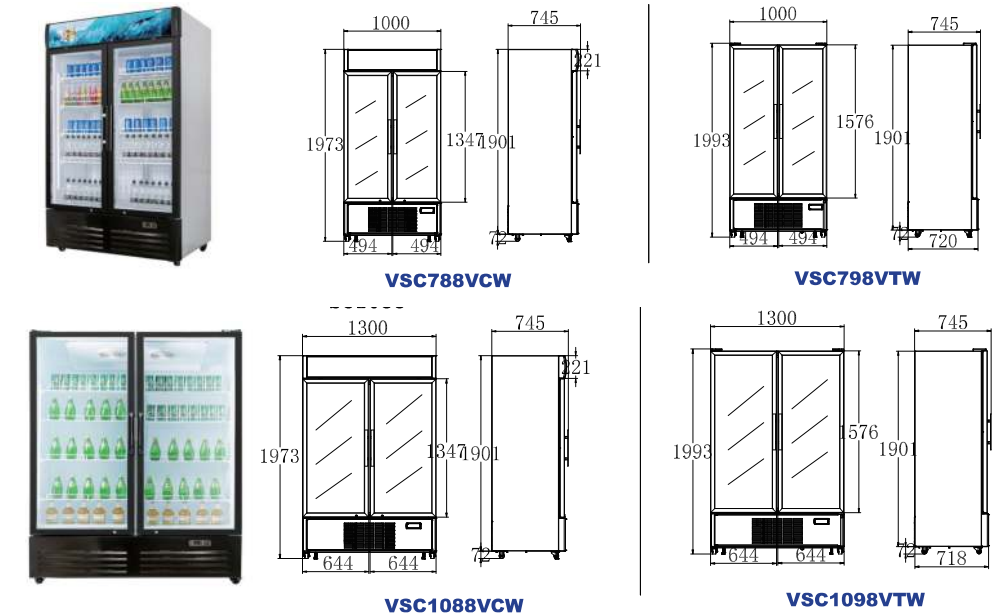

| MODEL      | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm      | CAPACITY<br>cu.ft.<br>liters | HP   | AMPS | VOLTAGE  | PLUG TYPE |
|------------|-------|---------|---------------------------------------|------------------------------|------|------|----------|-----------|
| VSC788VCW  | 2     | 8       | 39 3/8*29 3/8*77 5/8<br>1000*745*1973 | 26<br>736                    | 1/4+ | 6    | 115/60/1 | 5-15P     |
| VSC798VTW  | 2     | 8       | 39 3/8*29 3/8*77 5/8<br>1000*745*1973 | 26.5<br>751                  | 1/4+ | 6    | 115/60/1 | 5-15P     |
| VSC1088VCW | 2     | 8       | 51 1/8*29 3/8*77 5/8<br>1300*745*1973 | 35.3<br>1001                 | 1/4+ | 6    | 115/60/1 | 5-15P     |
| VSC1098VTW | 2     | 8       | 51 1/8*29 3/8*77 5/8<br>1300*745*1973 | 36<br>1020                   | 1/4+ | 6    | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD, WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

# Merchandising Sliding Door Refrigerator

- Ventilated cooling system, auto defrost.
- Exterior: Coated steel.  
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- C: with canopy    T: without canopy



VSC788VCS



VSC798VTS



VSC1088VCS



VSC1098VTS

| MODEL      | DOORS | SHELVES | DIMENSION(WxDxH)<br>inches<br>mm       | CAPACITY<br>cu.ft.<br>liters | HP   | AMPS | VOLTAGE  | PLUG TYPE |
|------------|-------|---------|----------------------------------------|------------------------------|------|------|----------|-----------|
| VSC788VCS  | 2     | 8       | 39 3/8"29 3/8"77 5/8"<br>1000×745×1973 | 26<br>736                    | 1/4+ | 6    | 115/60/1 | 5-15P     |
| VSC798VTS  | 2     | 8       | 39 3/8"29 3/8"77 5/8"<br>1000×745×1973 | 26.5<br>751                  | 1/4+ | 6    | 115/60/1 | 5-15P     |
| VSC1088VCS | 2     | 8       | 51 1/8"29 3/8"77 5/8"<br>1300×745×1973 | 35.3<br>1001                 | 1/4+ | 6    | 115/60/1 | 5-15P     |
| VSC1098VTS | 2     | 8       | 51 1/8"29 3/8"77 5/8"<br>1300×745×1973 | 36<br>1020                   | 1/4+ | 6    | 115/60/1 | 5-15P     |



VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com

VITLIFE AMERICA LLC  
320 WINFIELD RD ,WARRENVILLE, IL 60555  
Tel: 800 604 5402  
Email : info@vitlifecommercial.com  
www.vitlifecommercial.com