PROJECT:		
ITEM#		OTY:
MODEL#		-
AIA#	SIS # _	

CHEF BASE REFRIGERATOR

CBR52HC



EXCLUSIVE WARRANTY

- **6 Year Parts & Labor Warranty**
- 7 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)











CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back & bottom)
- · Aluminum Interior
- · Marine Top Standard
- · 3" Heavy Duty Casters
- 10' Cord And Plug (see electrical data for details)

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Electric Defrost Heater With Hot Gas Condensate Evaporation
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F

FEATURES

- High Performance Refrigeration System With Electronic Control
- · Top Weight Capacity 1000 lbs
- Heavy-Duty Drawer Slide Roller System
- · 275 lbs Drawer Load Rating (per drawer)
- Heavy Duty, Fire-Proof Reinforced Insulated, 16 Gauge Top
- No Heat Shield Required (must adhere to proper clearance per owners manual)
- Accommodates 6" Deep Full Size Food Service Pans (not included)
- Self-Closing Drawer Feature
- · One Piece, Snap-In, Magnetic Drawer Gasket
- Compressor Available On Left Or Right, Specify At Time Of



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

Secure-Temp™ Technology

· Stainless Steel Back

Stainless Steel Interior

- Drawer Locks
- · Additional Pan Supports
- 6" Casters
- · 6" Legs Or 6" Seismic Legs
- · Flat Top Overhang (any size up to 6" overhang on each side)
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back page)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 fax: (800) 253-5168


Rev. 9/1/23 Printed in U.S.A.


APPROVAL:	


__ DATE: __




CBR52HC





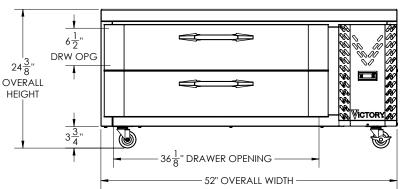



We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	9.58	Cabinet Voltage	115/60/1	Height	27"
Width, Overall (in.)	52"	Total Amperes	1.7	Width	58"
Depth, Overall (with handle)	34 1/8"	NEMA Plug (10' cord)	5-15P	Depth	38"
Height Overall (with casters)	24 3/8"	REFRIGERATION DATA		Crated Weight	400 lbs
Depth, Drawer Open 90°	61 1/4"	Condensing Unit Size, HP	1/6	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Drawer Openings (in.)	36 1/8" x 6 1/2"	Refrigerant*	R-290		
No. Of Drawers	2	Capacity (BTU/HR) (100°F/20°F)	1110		
		Heat Rejection (BTU/HR)	1665	time of order.	
		Charge (lbs/grams)	0.265/120		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 9/1/23 Printed in U.S.A.

