

# VICTORY<sup>®</sup> ULTRASPEC

PROJECT: \_\_\_\_\_

ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL # \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

## PASS-THRU SLIDING GLASS DOOR TOP MOUNT DISPLAY REFRIGERATOR

### DRSA-2D-S1-PT-LD-HC



### EXCLUSIVE WARRANTY

- ▶ 6 Year Parts & Labor Warranty
- ▶ 7 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



### CABINET CONSTRUCTION

- Stainless Steel Exterior
- Aluminum Interior
- Removable Sliding Glass Door
- Stay-Open Door Feature For Easy Product Loading
- Interior LED Light
- Hinged Front Shroud
- 6 Silver Freeze Wire Shelves
- 6" High Adjustable Stainless Steel Legs
- 8' Cord And Plug (see electrical data for details)

### FEATURES

- Full Electronic Control With Touchpoint Interface
- Expansion Valve Technology
- Manager's Lockout Feature
- Anti-Condensate Perimeter Heater
- Variable Speed Compressor Technology

### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

### OPTIONS & ACCESSORIES

- |                              |                      |                                                                         |
|------------------------------|----------------------|-------------------------------------------------------------------------|
| • Secure-Temp™ Technology    | • Additional Shelves | • FlexTemp Models Maintain Between 28°F And 38°F                        |
| • Stainless Steel Kick Plate | • 3" Or 6" Casters   | • Remote Models* (6" legs only)                                         |
| • Tie-In (banking) Strips    | • 6" Seismic Legs    | (refrigerant must be specified at time of order, see note on back page) |

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 9/1/23 Printed in the U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

PASS-THRU TOP MOUNT DISPLAY REFRIGERATOR

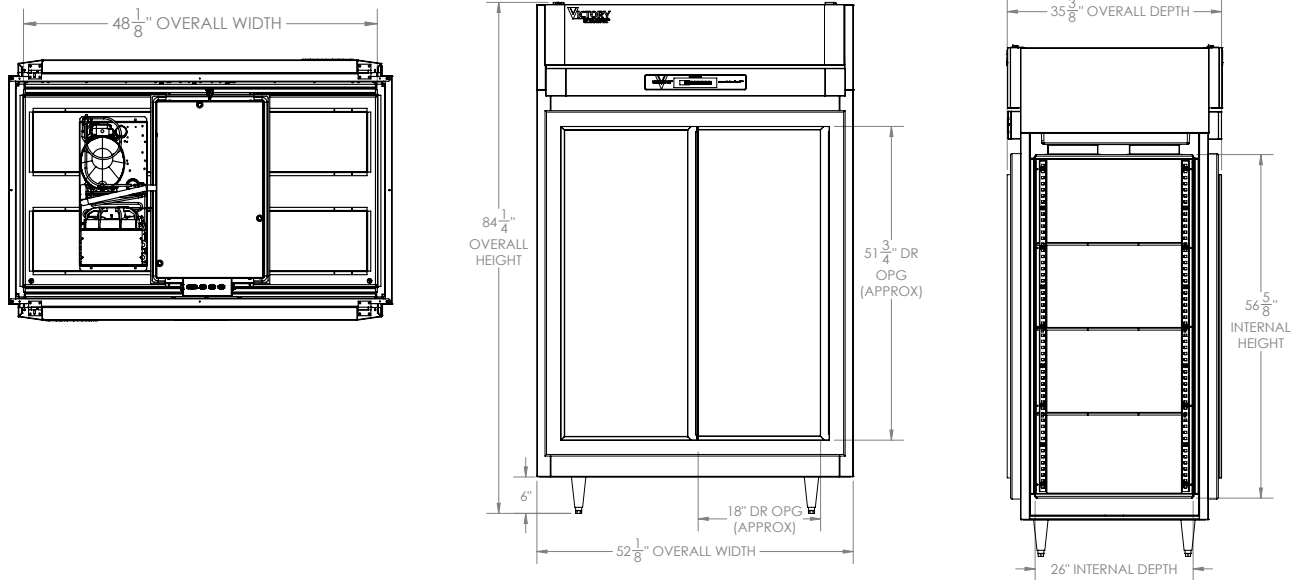

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

| CHARACTERISTICS              |               | ELECTRICAL DATA                |            | SHIPPING DETAILS                                                                                           |         |
|------------------------------|---------------|--------------------------------|------------|------------------------------------------------------------------------------------------------------------|---------|
| Net Capacity (cubic ft.)     | 48.50         | Cabinet Voltage**              | 115/60/1   | Height                                                                                                     | 88"     |
| Width, Overall (in.)         | 52 1/8"       | Total Amperes                  | 8.5        | Width                                                                                                      | 60"     |
| Depth, Overall (with handle) | 35 3/8"       | NEMA Plug (8' cord)            | 5-15P      | Depth                                                                                                      | 45"     |
| Height Overall (6" legs)     | 84 1/4"       | REFRIGERATION DATA             |            | Crated Weight                                                                                              | 606 lbs |
| Door Openings (in.)          | 18" x 51 3/4" | Condensing Unit Size, HP       | 3/4        | *NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order. |         |
| No. Of Doors/Shelves         | 4/6           | Refrigerant                    | R-290      |                                                                                                            |         |
|                              |               | Capacity (BTU/HR) (100°F/20°F) | 4950       |                                                                                                            |         |
|                              |               | Heat Rejection (BTU/HR)        | 7425       |                                                                                                            |         |
|                              |               | Charge (lbs/grams)             | 0.3307/150 |                                                                                                            |         |

\*\* NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 9/1/23 Printed in the U.S.A.

an Ali Group Company



The Spirit of Excellence