



PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

UNDERCOUNTER FREEZER

## UNDERCOUNTER FREEZER

### VUF60HC



#### EXCLUSIVE WARRANTY

- ▶ 6 Year Parts & Labor Warranty
- ▶ 7 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



#### CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back and bottom)
- Aluminum Interior
- Stainless Steel 20 Gauge Doors
- One Piece, Snap-In Magnetic Door Gaskets
- 6" Casters Two With Brakes
- 8' Cord And Plug (see electrical data for details)

#### FEATURES

- Full Electronic Control
- Stay-Open Door Feature For Easy Product Loading
- Heavy-Duty, Spring Loaded Cartridge Hinges
- Low Profile Horizontal Door Handles
- Epoxy Coated Shelves (2 per section)

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Freezer Capable Of Maintaining Product Temperature -10°F



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

#### OPTIONS & ACCESSORIES

- |                                             |                                        |                                                                            |
|---------------------------------------------|----------------------------------------|----------------------------------------------------------------------------|
| • Stainless Steel Interior                  | • Cutting Board                        | • Correctional Package                                                     |
| • Stainless Steel Back                      | • Additional Shelves                   | • Remote Models* (6" legs only)                                            |
| • Secure-Temp™ Technology                   | • Shelf Clips (set of 4)               | (refrigerant must be specified at time of order, see note on back on page) |
| • Door Locks                                | • Casters: 3", Roller Kit, Low Profile |                                                                            |
| • Door Swing Orientation (at time of order) | • 6" Legs Or 6" Seismic Legs           |                                                                            |

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168


[Sales@VictoryRefrigeration.com](mailto:Sales@VictoryRefrigeration.com) | [VictoryRefrigeration.com](http://VictoryRefrigeration.com)

Rev. 10/4/23 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

# VICTORY® UNDERCOUNTER FREEZER

## VUF60HC

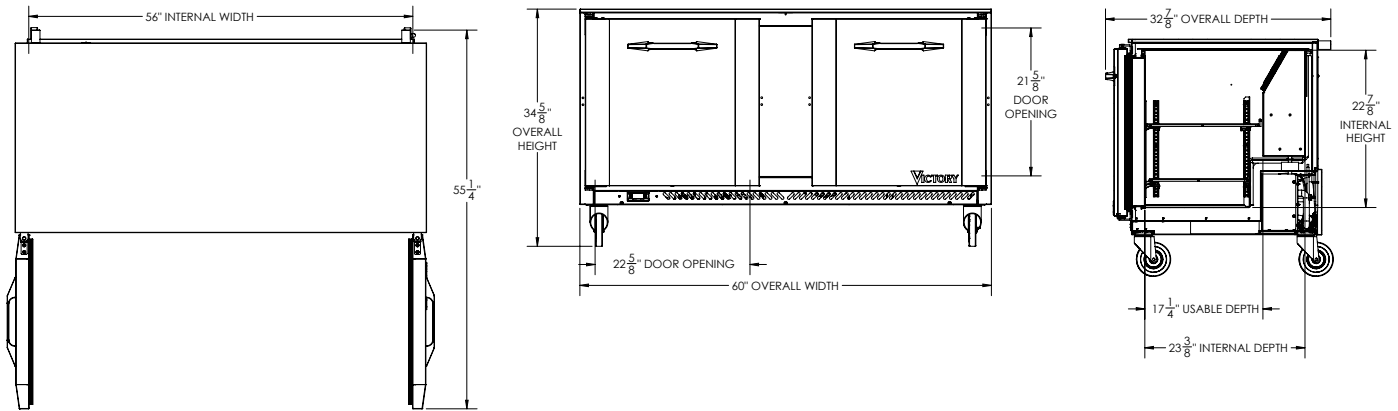

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

| CHARACTERISTICS                         |                   | ELECTRICAL DATA                 |          | SHIPPING DETAILS                                                                                            |         |
|-----------------------------------------|-------------------|---------------------------------|----------|-------------------------------------------------------------------------------------------------------------|---------|
| Net Capacity (cubic ft.)                | 14.39             | Cabinet Voltage                 | 115/60/1 | Height                                                                                                      | 48"     |
| Width, Overall (in.)                    | 60"               | Total Amperes                   | 5.0      | Width                                                                                                       | 63"     |
| Depth, Overall (with handle)            | 32 7/8"           | NEMA Plug (8' cord)             | 5-15P    | Depth                                                                                                       | 37"     |
| Height Overall (6" casters)             | 34 5/8"           | REFRIGERATION DATA              |          | Crated Weight                                                                                               | 354 lbs |
| Depth, Door Open 90°                    | 55 1/4"           | Condensing Unit Size, HP        | 1/2      | *NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order. |         |
| Door Openings (in.)                     | 22 5/8" x 21 5/8" | Refrigerant*                    | R-290    |                                                                                                             |         |
| No. Of Door/Shelves                     | 2/4               | Capacity (BTU/HR) (100°F/-20°F) | 1865     |                                                                                                             |         |
| Required Clearance: 3" Bottom & 2" Rear |                   | Heat Rejection (BTU/HR)         | 2797.5   |                                                                                                             |         |
|                                         |                   | Charge (lbs/grams)              | 0.165/75 |                                                                                                             |         |

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 10/4/23 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence