



Project:
Item Number:
Quantity:

LOW PROFILE HEAT STRIPS



- Bright annealed stainless steel heat reflector generates maximum performance for wider heat dispersion and offers larger temperature zone above 140°F (60° C) for safe food holding
- Sheathed element for dependability and longer life
- Unique element design offers greater heat dispersion for more effective warming
- Stainless steel mounting brackets with adjustable set screws provide proper spacing for safe installation or easy replacement
- Remote switch installation allows installation flexibility for your operation. Available with infinite or toggle switch.
- Available in natural aluminum or a variety of powder coats including: chrome, brass, black, white hammer, silver vein, and copper vein.

Note: All heat strips are custom ordered and therefore cannot be canceled or returned

DESCRIPTION

The Low Profile Heat Strip is intended to be used as a heat source to help maintain food at safe and ideal temperature until served.

FEATURES

- Low profile design
- Structurally engineered aluminum heater housing offers maximum strength with minimal weight

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship, one year parts and labor warranty, and additional one year warranty on heating element (parts only). For full warranty details, please refer to www.Vollrath.com.

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

FC-4SH-(AA)(BBB)-(CC)-(DD)

Step 1 Select Size	
Size	"AA" Suffix
18"	18
24"	24
30"	30
36"	36
42"	42
48"	48
54"	54
60"	60
66"	66
72"	72
78"	78
84"	84

Step 2 Select Voltage	
Voltage	"BBB" Suffix
120V	120
208V	208

Step 3 Select Color	
Color	"CC" Suffix
Natural Aluminum	NA
Chrome Powder Coat	CH
Brass Powder Coat	BR
Black Powder Coat	BL
White Hammer Powder Coat	WH
Silver Vein Powder Coat	SI
Copper Vein Powder Coat	CO

Step 4 Select Control	
Color	"DD" Suffix
Remote Infinite	IN
Remote Toggle Switch	SW

Example: FC-4SH-48120-BL-SW
 48 = 48" unit
 120 = 120V
 BL = Black Powder Coat
 SW = Remote Toggle Switch

*Controls cannot be retrofitted.

AGENCY LISTINGS



Approvals	Date




www.vollrathfoodservice.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Main Tel: 800.624.2051 or 920.457.4851
 Main Fax: 800.752.5620 or 920.459.6573
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
 Induction Products: 800.825.6036
 Countertop Warming Products: 800.354.1970
 All Other Products: 800.628.0832

LOW PROFILE HEAT STRIPS

DIMENSIONS - Inches (cm)

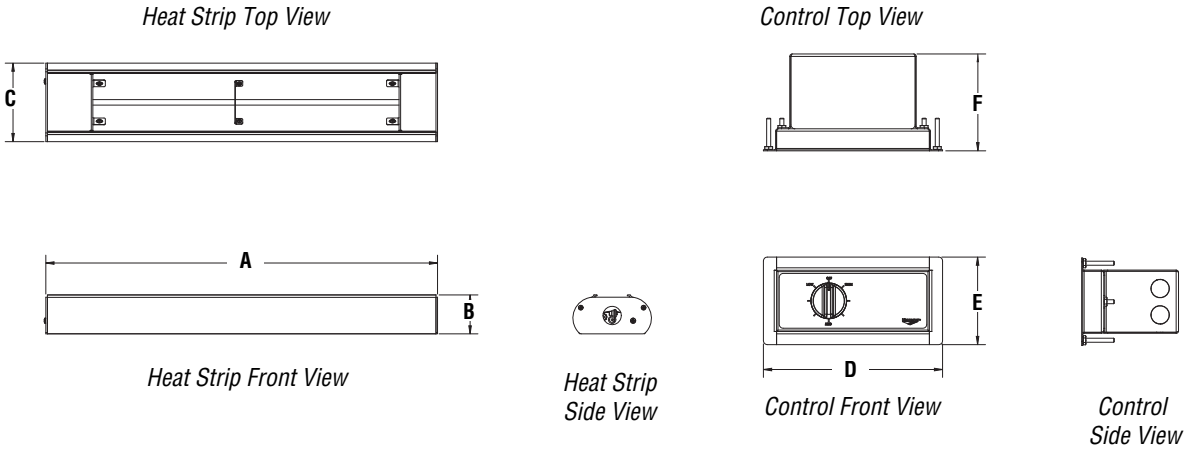

SPECIFICATIONS

Size	Wattage	Amp Draw		Dimensions						Shipping Weights lb (kg)
		120V	208V	(A) Length (cm)	(B) Height (cm)	(C) Width (cm)	(D) Control Width (cm)	(E) Control Height (cm)	(F) Control Depth (cm)	
18"	414	3.5	2.0	18.71 (47.5)	1.86 (4.7)	3.75 (9.5)	8.5 (21.6)	4.15 (10.5)	4.60 (11.7)	7.7(3.5)
24"	553	4.6	2.7	24.71 (62.8)						8.3 (3.8)
30"	690	5.8	3.3	30.71 (78.0)						9.0 (4.1)
36"	826	6.9	4.0	36.71 (93.2)						9.7 (4.4)
42"	966	8.1	4.6	42.71 (108.5)						10.5 (4.7)
48"	1103	9.2	5.3	48.71 (123.7)						11.3 (5.1)
54"	1237	10.3	5.9	54.71(139.0)						12.2 (5.5)
60"	1381	11.5	6.6	60.71 (154.2)						13.1 (5.9)
66"	1515	12.6	7.3	66.71 (169.4)						14.1 (6.4)
72"	1659	13.8	8.0	72.71 (184.7)						15.1 (6.9)
78"	1800	15.0	8.7	78.71 (199.9)						16.2 (7.4)
84"	1950	16.3	9.4	84.71 (215.2)						17.5 (7.9)

CLEARANCES

Distances Between Heat Strip and Surface Below

Clearance	Non-Combustible Surface	Combustible Surface
Bottom of non-coated strip to surface below (minimum distance)	11" (27.9 cm)	18" (45.7 cm)
Bottom of coated strip to surface below (minimum distance)	16" (40.6 cm)	18" (45.7 cm)

UL Mounting Clearance Requirements

Clearance (Minimum Distances)	Non-Combustible Surface (Uncoated)	Non-Combustible Surface (Coated)	Combustible Surface
Top of strip to surface above	1" (2.5 cm)	2" (5.1 cm)	2" (5.1 cm)
Side of strip to adjacent surface	1" (2.5 cm)	4" (10.2 cm)	5" (12.7 cm)
End of strip to adjacent surface	1" (2.5 cm)	1" (2.5 cm)	4" (10.2 cm)
Setback from front opening on pass thru application: maximum of 8" (20.3 cm)			

ACCESSORIES

All units are supplied with 3" mounting brackets. Optional brackets that can be purchased as accessories are 1" (p/n 353028-2) and 2" (353029-2).

An optional lead wire extension kit (p/n 353027-2) can be purchased to extend 6 foot stock leads an additional 6 feet.



www.vollrathfoodservice.com

The Vollrath Company, L.L.C.

1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Main Tel: 800.624.2051 or 920.457.4851
 Main Fax: 800.752.5620 or 920.459.6573
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560

Technical Services

techservicereps@vollrathco.com
 Induction Products: 800.825.6036
 Countertop Warming Products: 800.354.1970
 All Other Products: 800.628.0832