

Over 90 Years Of Quality Foodservice Products And Service

F-1725 Counter Top Fryer



Model F-1725

DESCRIPTION

Wells F-1725 counter top fryer is one of the most dependable, durable and easy-to-use fryers in the industry and comes with two rear hanging, half-size fry baskets standard. 40 Lb. capacity, deep drawn fry pot is removable and made of stainless steel for strength, durability and long life. The fry pot is easily removable and holds 40 Lbs. of oil.

SPECIFICATIONS

CONSTRUCTION – features stainless steel top, front, sides, fry pot and elements. Adjustable 4" legs are included.

ELEMENTS – F-1725 fryers are equipped with swing-up, immersion-type, heavy duty, stainless steel elements. Elements are rated at 17,250 watts in 208V and 17,250 watts in 240V and will produce up to 900 each 2-oz. servings of French fries per hour or 60 Lbs. of chicken per hour. Elements are located below the basket for even heat distribution. Elements control housing has a springloaded, self-locking rod support to safely secure elements when is in the raised position.

CONTROLS – The Wells F-1725 features a single control. Oil temperature is operated by a positive off, adjustable, snap-action thermostat that ranges from 275° F to 375° F. A manual reset safety thermostat shuts the heating element power should an over temperature occur. A red signal light indicates an over temperature condition.

STANDARD FEATURES

- □ Stainless steel front, top & sides
- Deep drawn, removable, stainless steel fry pot contains 40 Lbs. of oil
- Two, half-size rear hanging baskets
- 4-inch adjustable legs
- One piece, swing-up, tubular elements
- Dual, positive-off operator-adjustable thermostats
- Safety high-limit thermostats to prevent over heating with indicator light and manual re-set
- One [1] year parts and labor warranty

OPTIONS & ACCESSORIES

- □ 1/2-size fry basket
- Fry pot replacement
- 4-inch metal leg set of four

CERTIFICATIONS



F1725-04/2018







F-1725 Counter Top Fryer

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE							
BACK	SIDE	BOTTOM	FRONT				
NA	NA	NA	30				
NA	NA	NA	[762]				
NOTE: Creatifications are subject to change without notice							

NOTE: Specifications are subject to change without notice

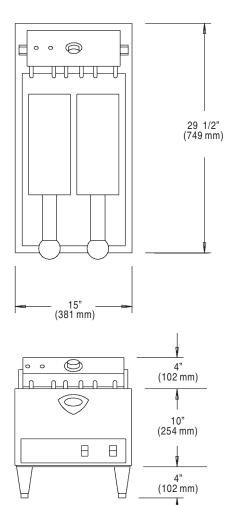

NOTE: Specifications are subject to change without notice and are not intended for installation purposes.

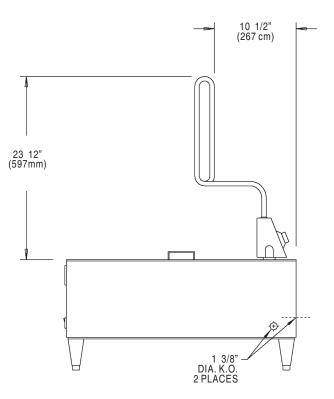

Model Number	W x D x H (w/legs)	Voltage & 3 Phase	Watts Amps per Line 3 Phase		ne	Weight (Shipping)	
F-1725	15" x 29-1/2" x 18"	208V	17,250	47.8	47.8	47.8	85 Lbs.
	381mm x 749mm x 458mm	240V	17,250	41.5	41.5	41.5	39 Kilos

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Wells Manufacturing • 265 Hobson Street, Smithville, Tennessee 37166 U.S.A. Phone : (314) 678-6314 • Fax (314) 781-5445 www.wells-mfg.com • Printed in the U.S.A.

Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.