

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

HORIZON BOTTOM MOUNT REACH-IN

HBF44HC Solid Door Reach-In Freezer

Hydrocarbon Series





7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, side, and grille (galvanized back & bottom)
- Stainless steel interior
- Full electronic control with one-touch defrost
- One-piece grille allow easy removal/installation for preventative maintenance
- Expansion valve technology
- Self closing door with 120° stay open feature
- Door locks (solid doors only)
- LED lighting
- · Spring-loaded style hinges
- Plug-in magnetic door gaskets
- Six (6) heavy duty epoxy coated wire shelves
- 6" Casters with two (2) brakes

OPTIONS & ACCESSORIES

- Stainless steel universal tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- 3" Casters or 6" legs
- · Epoxy shelves
- · Shelf clips
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- · Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Freezer capable of maintaining product temperature down to -10°F












MODEL	HBF44HC-1	
EXTERNAL DIMENSIONAL DATA		
Width Overall	47"	
Depth Overall with Handle	33 3/4"	
Height Overall	84 1/4"	
Number of Doors	2	
Depth with Door Open 90°	53 %"	
Door Openings (in)	20 1⁄8" x 52 5⁄8"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	44	
Internal Width Overall (in)	44"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	61 %"	
Internal Height Usable (in)	55"	
Number of Shelves	6	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	10.0	
REFRIGERATION DATA		
Horsepower	3/4	
Capacity (BTU/Hr)	2772	
Heat Rejection (BTU/Hr)	4158	
Charge (lbs/grams/ounces)	0.2205 / 100 / 3.53	
SHIPPING DATA		
Gross Weight - Crated	562 lbs	
Height - Crated	86"	
Width - Crated	49"	
Depth - Crated	36"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4°. Metric dimensions (MM).

Bottom Mount Reach-In Freezer Model: HBF44HC-1

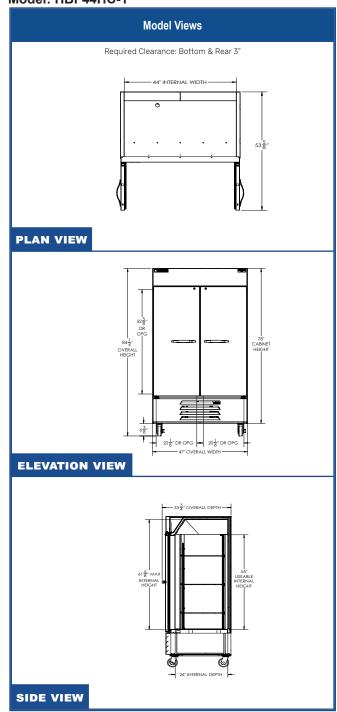







115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

