DESIGNER LINE BASE MODEL

Model: DFA60NSS-D

Natural Refrigerant R-290 Model



60" Base Worktop Freezer with Drawers

Heavy gauge #300 Series stainless steel top, stainless steel front, end panels and interior, galvanized steel rear and grill.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel back	Front breathing
Overshelves (single or double)	Drawer in lieu of door section above the condensing unit*
Casters	Condensing unit left (standard on right)
Door/drawer locks	Doors in lieu of drawers (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
::		
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer/door handles

Spring loaded, self closing doors over condensing unit

Magnetic, snap in Santoprene™ door gaskets

Stainless steel roll out drawers

Completely enclosed, vented and removable rear and side grills

6" adjustable stainless steel legs

MODEL FEATURES

Electronic controller with digital display & hi-low alarm

Automatic electric defrost

Refrigerated section with door above the condensing unit

Field rehingeable doors over condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.

NOTE: Models come standard with a door over the condensing unit, a smaller width door (left section) and two tier drawers (center section). A drawer over the condensing unit is an option. The option of having the left/center drawers located in the opposite sections MUST be indicated at the time of ordering.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

^{*}Drawer section above condensing unit holds (1) $12 \times 20 \times 6$ pan.

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	19 (538 cu I)
Width, Overall (inches)	60 (1524 mm)
Depth, Overall (inches) (including handles & bumpers)	36 5/16 (922 mm)
Height, Overall (inches) (including 6" legs)	41 ½ (1054 mm)
Number of Drawers	4
Number of Half Doors	1
Interior Depth (inches) (above condenser)	30 (762 mm)
Interior Height (inches) (smaller section)	26 (660 mm)
Interior Height (inches) (above condenser)	12 ½ (318 mm)
Interior Width (inches) (smaller section)	17 (1422 mm)
Interior Width (inches) (above condenser)	17 (1422 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	2180
ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	7.0 (4.2)
Defrost Amps (International)	9.1 (4.8)
10 ft. Cord/Plug [attached] (International)	Yes (No)
SHIPPING DATA	
Weight (pounds)	425 (193 kg)
Height - Crated (inches)	43 ¾ (1111 mm)

DRAWER PAN CONFIGURATIONS

Width - Crated (inches)

Depth - Crated (inches)

Two Tier: (2) 12 x 20 x 6 pans per drawer

Two Narrow: (1) 12 x 20 x 6 pan per drawer (supplied by others)

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest
whole unit.

Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

62 (1575 mm)

47 (1194 mm)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

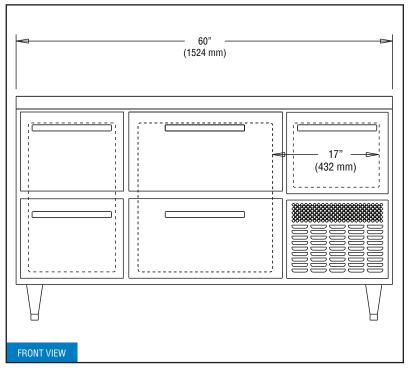

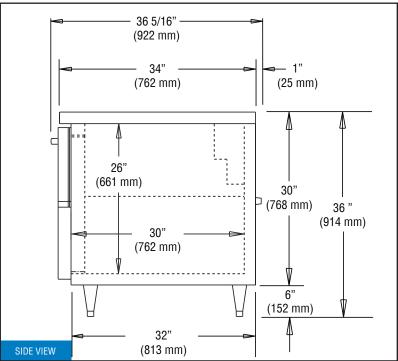

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>