




A family company manufacturing in the USA

www.glastender.com

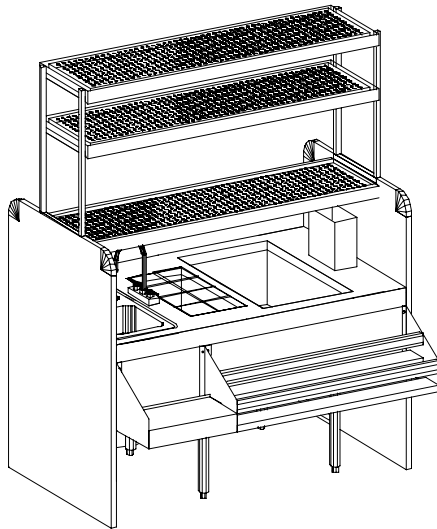

CS-54x32-CCW
with Optional
Double Overshelf

NOTE: Cocktail stations can be ordered without the laminated front and end panels for customers who wish to provide their own. Add the suffix '-S' in the model number when ordering.

To view underbar installation instructions, please visit: https://www.glastender.com/PDF/F-750-165_Underbar_Installation_Instructions.pdf
To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Specifications

Ice Bin

- 16" by 26-1/2" by 10-1/2" deep

Sink Bowls

- 9-1/4" by 11-1/2" by 6" deep

Tubing Chase

- 4" by 8" by 6-1/2" high

Sneeze Guard (optional)

- 17-1/4" by 27-1/2" by 10" high

Ice Bin Drain

- Standard model...1-1/2" tailpiece
- Ten circuit cold plate model...1/2" MPT

Insulated Bottle Well Drain

- 1-1/2" tailpiece

Sink Drains

- 1-1/2" I.P.S. Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.

Tray and Overshelf (optional) Drains

- 1/2" tailpiece

Faucet

- On 4" centers, accepts 3/8" sink leads, hot and cold water connections required

Cold Plate

- Ten circuit available



Intertek

4004503

Conforms to NSF/ANSI STD 2
Certified to CSA STD B45.4

Shelf Heights

- Tray shelf...44"
- Single overshelf (optional)...69"
- Double overshelf (optional)...63" and 72"

Rotation

- Ice bin can be at bartender's left (clockwise) or right (counterclockwise) - specify when ordering

Materials

- 20 gauge stainless steel parts include: tray shelf and inserts, tubing chase, work surface, blender shelf, double speed rail steps, bowls, and ice bins (Stainless front and end panels if specified)
- 18 gauge stainless steel parts include: leg set cross braces and leg pads
- 16 gauge stainless steel parts include: leg mounting brackets and legs
- 14 gauge stainless steel parts include: blender shelf ends and double speed rail ends
- Laminated wooden front and end panels
- 1/4" clear acrylic sneeze guard (optional)

Recommendations

- Provide 12" by 12" open floor drain (safe waste) under ice bin - consult local codes
- Provide 120V, 20 AMP, four-plex electrical outlet below ice bin for appliances such as blenders, carbonators, dispensers, etc.

⚠ WARNING: The plastic wet waste strainer included with this product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. **Warning applies to State of California only.** Part #03000483



**All faucets are NSF/ANSI 61, Annex G
low lead compliant**

Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.


Approval/Notes:

CS-54x32 Cocktail Station

Dimensional Information

CS-54x32-CW

(Clockwise Rotation)

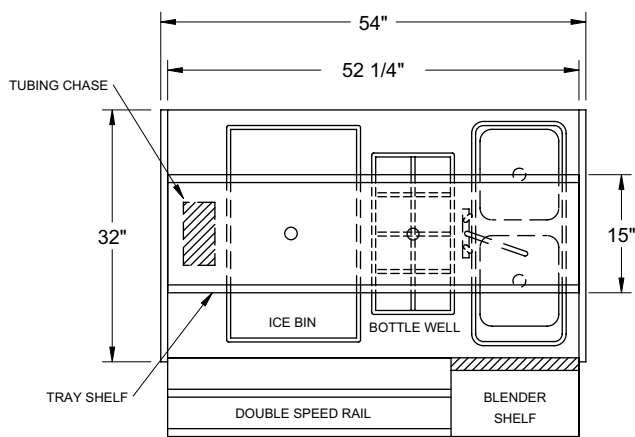


BARTENDER SIDE

PLAN VIEW


CS-54x32-CCW

(Counterclockwise Rotation)

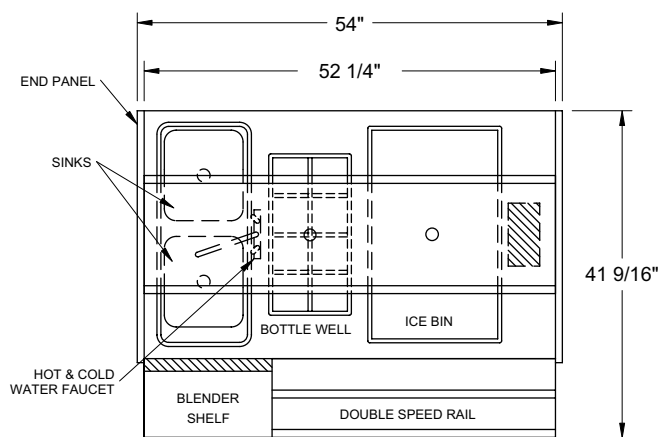


BARTENDER SIDE

PLAN VIEW

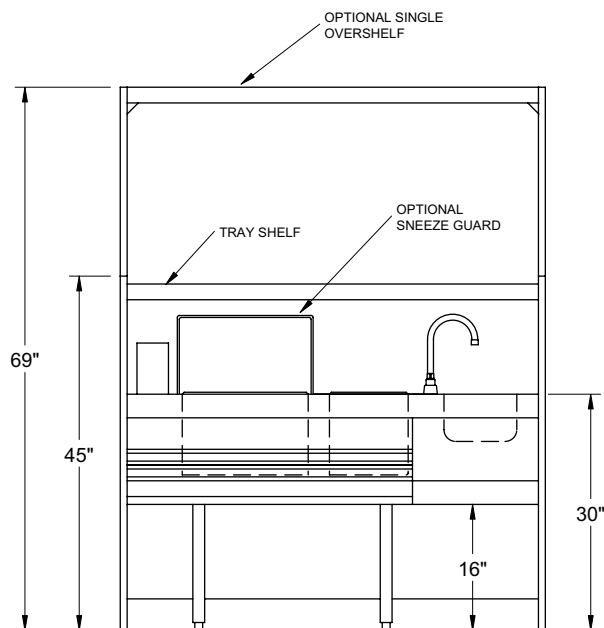

BARTENDER SIDE ELEVATION

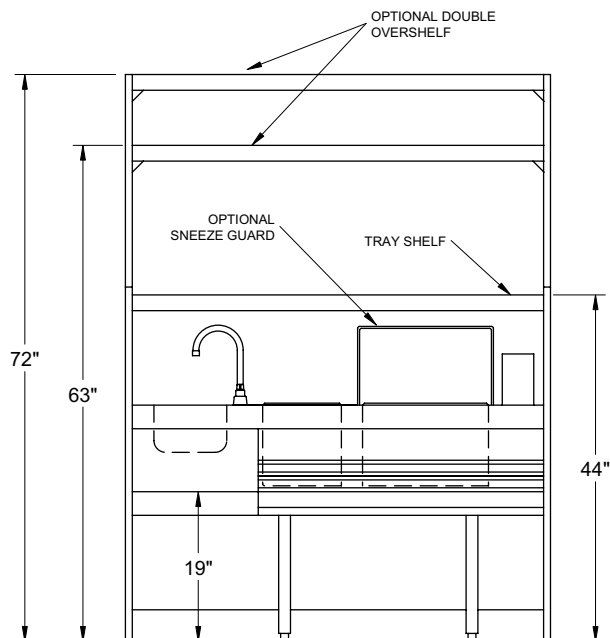

BARTENDER SIDE ELEVATION

OPTIONAL ACCESSORIES

MODEL

CPS-54x32
02001023
SOS/SS-54
DOS/SS-54

DESCRIPTION

Convert laminated panels to stainless
Ten-circuit sealed cold plate
Stainless steel single overshelf
Stainless steel double overshelf

MODEL

IBD-H-CS32
CCD/T
03000509
CDRY

DESCRIPTION

Ice bin divider, half
Clip-on condiment dispenser
Sneeze guard
Clip-on dry waste, stainless steel