

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

HORIZON TOP MOUNT REACH-IN

MODEL: HF3HC-1HS

HF3HC Half-Solid Triple Door Reach-in Freezer **Hydrocarbon Series**



OPTIONS & ACCESSORIES

• Tray slide pair, 1 tray slide set for (1) 18" x

 Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18"

• Tray slide kit #4 (19 sets per half section)

Remote option* (see note on back page)

26" or (2) 14" x 18" pans (A)

Additional epoxy shelves

Stainless steel breaker

• 6" Legs seismic/flanged

pans (AC)

· Shelf clips

• 3" Casters

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front and gray painted sides
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Expansion valve technology
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Field reversible doors
- Door locks
- Snap-In magnetic gaskets for positive door seal
- Anti-microbial door handles
- Heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

FINISH OPTION

HF Standard

(S/S Front, Continuous Coil Coated Sides, Aluminum Interior)

(S/S Front, S/S Sides, Aluminum Interior)

HFS

(S/S Front, Continuous Coil Coated Sides, S/S Interior)

(Complete S/S Exterior & Interior)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Hot gas condensate evaporator
- Adaptive Defrost
- Epoxy coated evaporator coil
- Freezer capable of maintaining product temperature down to -10°F
















MODEL	HF3HC-1HS
EXTERNAL DIMENSIONAL DATA	
Width Overall	78"
Depth Overall with Handle	33 % "
Height Overall	85"
Number of Doors	6
Depth with Door Open 90°	55 ½"
Door Opening (in)	21 %" x 29 %"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	69.1
Internal Width Overall (in)	74"
Internal Depth Overall (in)	25 1/8"
Internal Height Overall (in)	62"
Number. of Shelves	9
ELECTRICAL DATA	
Full Load Amperes 115/60/1	13.2
REFRIGERATION DATA	
Horsepower* 115/60/1	(2) 3/4
Capacity (BTU/Hr)*	3854
SHIPPING DATA	
Gross Weight	735 lbs
Height - Crated	88"
Width - Crated	81"
Depth - Crated	36"

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Top Mount Reach-In Freezer

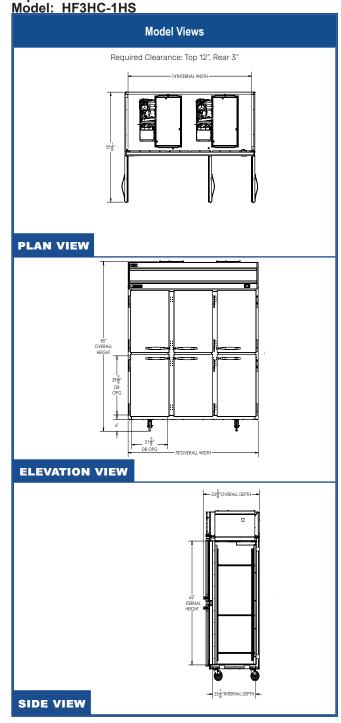







Units pre-wired at factory 115/60/1 and include 8' long cord and plug set.

