



ULR67B

Undercounter 67" Refrigerator



ULR67B
09/09/24
Item # 13691

W x D x H
67" x 33.25" x 33.875" *
*with 4" casters



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

Two-Section ULR67B

19.97 ft³

Overall Width x Depth (including 1" bumper)

67" x 33.25"

Height (including 4" casters)

33.875"

Door Opening Width x Height

22.5" x 23"

Depth with Door Open at 90° (including 1" bumper)

57.75"

Adjustable Shelves

4

Shelf Dimensions (W x D)

24.75" x 25.5"

Crated Weight

345 lbs.

Crated Length x Width x Height

70.75" x 35.75" x 36"

Electrical / Refrigeration

Voltage

115/60/1

HACR Breaker

15.0 Amps

Electrical Connection (NEMA)

5-15P

Voltage Range

104-126

Ambient Temp. Range

45° to 100°F

Control Setpoint Range

28° to 45°F

Recommended Setpoint

36°F

Amperage

3

Energy Consumption (kWh/day) @ASHRAE

1.33

Heat Rejection (BTU/Hr.) @NSF

341

Approx. Nominal Compres. BTU/HR (HP)

1354 (1/5HP)

Refrigerant / Charge Amount (oz)

R290 (2.2 oz)

Options

- ☐ 2" Casters (HS-5037, set of 4)
- ☐ 6" Casters (HS-5036, set of 4)
- ☐ Foot pedal kit (HS-5555, Lft hinge)
- ☐ Foot pedal kit (HS-5556, Rt hinge)
- ☐ Door locks (factory request)
- ☐ Reversible door (field reversible)

- ☐ Overshelves (HS-5231 single)
- ☐ Overshelves (HS-5230 double)
- ☐ Addtl. Epoxy Shelves (HS-5151, 1pk)
- ☐ Addtl. Stainless Shelves (HS-5153, 1pk)
- ☐ Stainless steel back panel (factory request)



Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Stainless steel exterior front, sides, and top with stainless steel interior sides, back, and floor
- Front breathing air flow design
 - Environmentally friendly R290 hydrocarbon refrigerant
 - Cabinet and doors are insulated with 2" CFC free, foamed in place polyurethane
 - Exclusive "stepped" door design to protect door gasket
 - Spring assisted self-closing doors with stay open feature
 - Extruded aluminum flush mount door handle
 - Field reversible doors & magnetic door gasket is easily removable for cleaning
 - Removable air filter for easy cleaning
 - Hot gas condensate removal
 - Mullion heaters for reduced condensation
 - Digital temperature display
 - E-coated evaporator coil
 - Two epoxy coated shelves per section is standard
 - Anodized aluminum shelf supports adjustable in 1/2" increments
 - Shelves hold a full sized sheet pan & 120 lbs. capacity
 - Standard with 4" casters (two with brakes)
 - 10 ft. cord and plug




ULR67B

Undercounter 67" Refrigerator




ULR67B
09/09/24
Item # 13691


FRONT VIEW

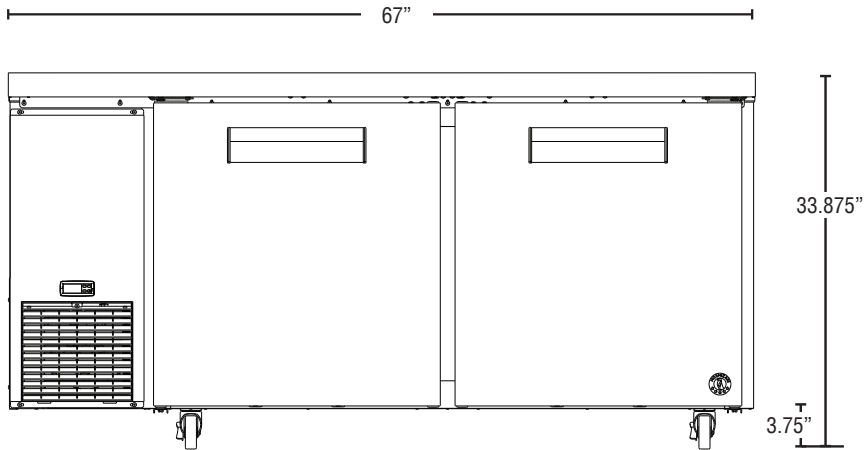

SIDE VIEW

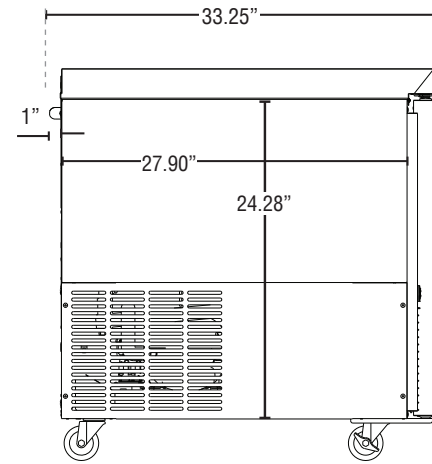

PLAN VIEW

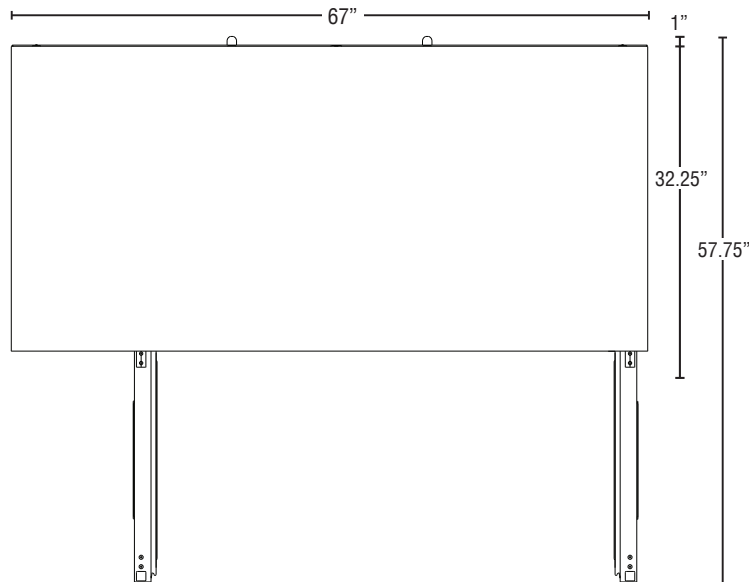

Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, and floor with an ABS top. Two heavy duty epoxy coated shelves per section is standard. Mounted on anodized aluminum pilasters the shelves are adjustable in 1/2" increments. Cabinet walls are insulated with 2" CFC free, foamed in place polyurethane. 4" polyolefin, stem casters (two with brakes) are standard.

Door Construction

Doors are constructed of high grade stainless steel exterior with an ABS interior liner and are insulated with 2" CFC free, foamed in place polyurethane. Hoshizaki's exclusive "stepped" design protects the gasket while product is removed from the cabinet. Doors are provided with a one piece, extruded aluminum, flush mount handle. Spring assisted self-closing doors are equipped with a stay open feature past 90 degrees. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Field reversible door hinging is standard.

Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes an off-cycle defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).