

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

Pass Thru Half Solid Door Heated Cabinet

Pass-Thru
PRO Series

Model : PRO-50-4H-PT-AL(-AR)

FEATURES & BENEFITS

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Sensitive touch display.

■ Ducted fan air distribution system

Maintains temperature within the food zone

■ On/Off switch

ON/OFF switch is located on control panel

■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Half length stainless steel solid doors with locks

■ Self-closing doors with stay open feature at 120 degrees

■ Heated cabinet holds 140°F ~ 180°F for the best in food preservation

■ Lifetime guaranteed heavy duty hinges and handles

- PRO-50-4H-PT: Right hinged + Left hinged
- PRO-50-4H-PT-AL: All Left hinged
- PRO-50-4H-PT-AR: All Right hinged



Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
PRO-50-4H-PT-AL(-AR)	8	48.7	6	3000	15	567	51 3/4 x 36 1/4 x 78

Pass Thru Half Solid Door Heated Cabinet

Pass-Thru
PRO Series

Model : PRO-50-4H-PT-AL(-AR)

ELECTRICAL DATA	
Voltage	208/115/60/1
Plug Type	☉ NEMA L14-20P
Full Load Amperes	15
Wattage (W)	3000
Feed Wires with Ground	4
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	8
# of Racks Accepted	2
Net Capacity (cu. ft.)	48.7
Ext. Length Overall (in.)	51 3/4 (1314mm)
Ext. Depth Overall (in.)*	36 1/4 (920mm)
Ext. Height Overall (in.)†	78 (1982mm)
Int. Length Overall (in.)	42 1/4 (1073mm)
Int. Depth Overall (in.)	27 5/8 (702mm)
Int. Height Overall (in.)	58 3/4 (1493mm)
# of Shelves	6
Shelf Size (L x D) (in.)	22 3/4 x 26 3/8
Net Weight (lbs.)	499
Gross Weight (lbs.)	567

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design


** Lead time applies. Please contact your sales representative for more details to order.

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- Half door bun tray rack: TSP-2224
(each holds up to six 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

PLAN VIEW

(unit : inch)

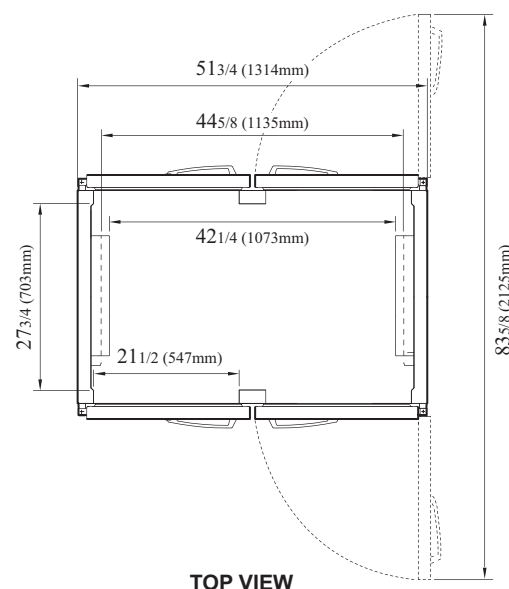

TOP VIEW

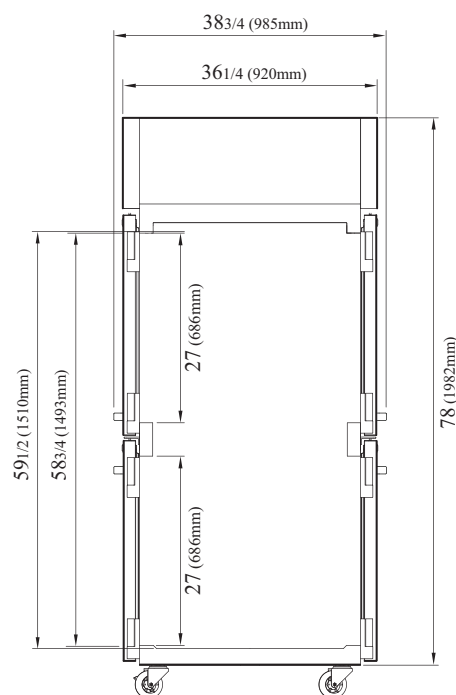

SIDE VIEW

Ver.20200420



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

RADIANCE

REFRIGERATION SYSTEM
Turbo air

Texaking