



PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

SINGLE ACCESS, FORCED AIR: SCHOOL MILK SERIES

## SCHOOL MILK FORCED AIR COOLER

### VMCF49-1-S-HC



#### CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior
- Stainless Steel Lid, Hinges Door And Door Latches
- Full Electronic Control
- Heavy-Duty Epoxy Coated Steel Wire Floor Racks Standard
- Floor Drain Is Centrally Located For Easy Cleaning
- Flexible Compression Door Gaskets Ensure Tight Seal
- Self-Latching Doors/Lids With Safety Bumpers

#### FEATURES

- Exterior Thermometer
- Cylinder Lock
- 6" Heavy-Duty Plate Casters (2 with locks)

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Epoxy Coated Evaporator Coil
- Balanced, Forced-Air Refrigeration System Provides Rapid Chilling Of Product
- Maintains Product Temperature Between 36° - 40°F



- ▶ 3 Year Parts & Labor Warranty  
Plus An Additional 4 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

#### OPTIONS & ACCESSORIES

- Corner Bumpers
- Cafeteria Tray Slides
- Graphics

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

[Sales@VictoryRefrigeration.com](mailto:Sales@VictoryRefrigeration.com) | [VictoryRefrigeration.com](http://VictoryRefrigeration.com)


Rev. 12/3/21 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_



# SCHOOL MILK FORCED AIR COOLER

## VMCF49-1-S-HC

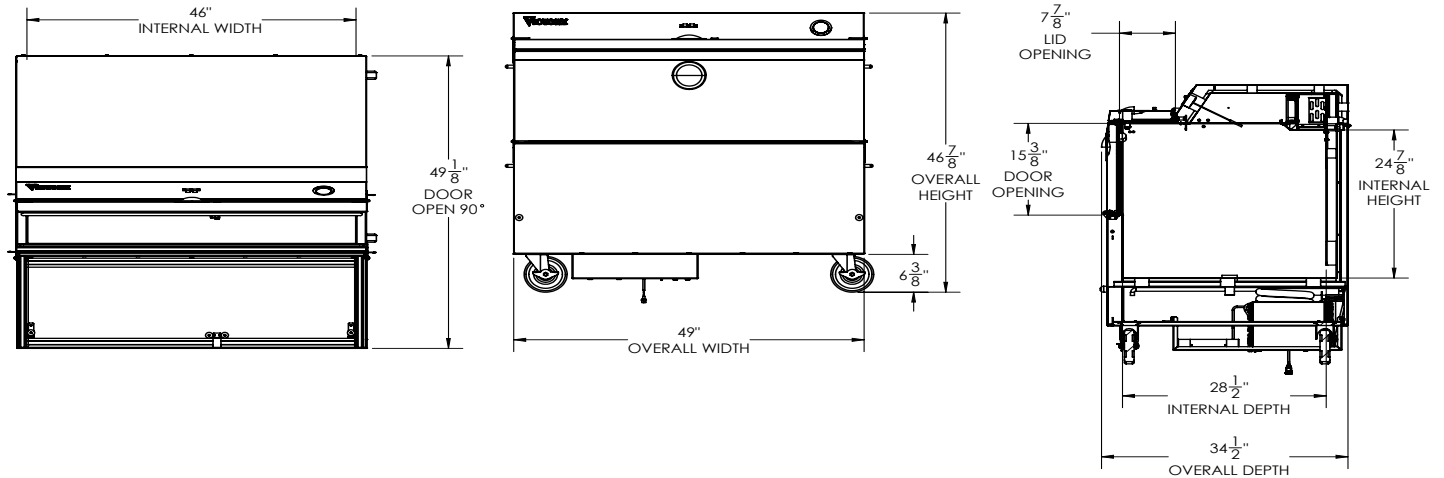

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	18.87	Cabinet Voltage	115/60/1	Height	54"
Width, Overall (in.)	49"	Total Amperes	3.0	Width	54"
Depth, Overall (in.)	34 1/2"	NEMA Plug (8' cord)	5-15P	Depth	38"
Height Overall (with casters)	46 7/8"	REFRIGERATION DATA		Crated Weight	440 lbs
Depth, Door Open 90°	49 1/8"	Condensing Unit Size, HP	1/4		
No. Of Lids/Doors	1/1	Refrigerant	R290		
Case Capacity	12 - 13" X 13" X 11" 8 - 19" X 13" X 11"	Capacity (BTU/HR) (100°F/20°F)	1480		
		Heat Rejection (BTU/HR)	2220		
		Charge (lbs/grams)	0.15625/70		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 12/3/21 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence